



ICE MERCHANDISERS



**We're With You Every  
*Degree* Of The Way**







## ABOUT LEER

Through decades of commitment to product development, customer service and a relentless focus on American-made manufacturing excellence, Leer has continued to shape and drive innovation in the temperature-controlled storage industry. We're dedicated to the success of all our customers – be that customers of our iconic white Ice Merchandisers, Ice Vending Machines, Refrigerated Transports, Reach-In Storage Freezers, or our custom-built Walk-In Coolers & Freezers.

We'd be honored to earn your business and become your trusted partner in temperature-controlled storage solutions. When you buy from Leer, you're not just buying our products but a commitment from all of us and that's a promise to be with you every degree of the way. We're confident our products provide a value that cannot be beaten.

## OUR MISSION

- To be your trusted partner in temperature-controlled storage solutions.
- To partner with our customers to design and develop the highest quality, innovative, temperature-controlled storage solutions to meet their ever-changing needs.
- To provide our customers exceptional quality and outstanding customer service at every stage of every interaction.
- To train and support all employee owners to produce products they can proudly label Made-In-The-USA.
- To promote safe and healthy work practices and environments that benefit all.

## WHEN YOU BUY FROM LEER

- You have our lifetime support – we're with you every degree of the way.
- We're dedicated to delivering our products right the first time, right every time.
- Our products are intelligent-by-design because we know every degree matters.
- We're 100% employee owned – those employee owners make a distinctive difference because you have the commitment of not just one owner, but hundreds of owners.
- We have decades of commitment to product development and customer service with a relentless focus on manufacturing quality from America's heartland.

## OUR VISION

We will exceed the highest expectations of our customers, employee owners, partners, shareholders and community by continually delivering the best possible American-made products. We're with you every *degree* of the way.

## WE VALUE

- Building Trust
- Wowing Customers
- Constantly Improving
- Working Together
- Embracing Ownership

## WE BELIEVE

- All stakeholders are valuable partners in delivering our vision and executing our mission, and are invested in doing both.
- In best intentions at all times, and taking a commonsense and practical path to address differences.

## OUR FAMILY

We're a proud member of Dexter Apache Holdings, Inc. (dexterapache.com), a leading 100% employee-owned company with diverse business interests in the manufacturing, distribution, financial services and mission critical technology industries.

## ICE MERCHANTISER LINEUP



### INDOOR ICE MERCHANTISERS

For ice manufacturers, retail store owners, and special sites alike, Leer is the industry leader in innovation, quality, lead-time and reliability across our lineup of customizable indoor, outdoor, and specialty Ice Merchandisers.



FIND OUT MORE ON PAGE 4



### OUTDOOR ICE MERCHANTISERS

For ice manufacturers, retail store owners, and special sites alike, Leer is the industry leader in innovation, quality, lead-time and reliability across our lineup of customizable outdoor, indoor, and specialty Ice Merchandisers.



FIND OUT MORE ON PAGE 20



### PALLET LOAD ICE MERCHANTISERS

These innovative merchandisers are effortless to fill and make it possible to load entire pallets of ice in just minutes. The engineering efficiencies eliminate the need to load thousands of pounds of ice by hand.



FIND OUT MORE ON PAGE 41





## INDOOR ICE MERCHANDISERS

### 1. LEER INC.

- **Your Partner in Temperature-Controlled Storage Solutions** - With over 65 years of industry expertise, innovation and focus on manufacturing excellence, we're confident our products feature industry leading efficiency, reliability, durability and longevity - delivering an unbeatable value to you and your company.
- **Made in Wisconsin, USA** - Manufactured under a strict quality control program to ensure our products are delivered right the first time, right every time.
- **Iconic Red Snow-Capped ICE Decals** - The trademarked ICE decals are a staple of the Packaged Ice Industry and Leer's unique signature that you can't get anywhere else.
- **We're With You Every Degree of the Way** - As an employee owned company, our success depends on your success. We stand behind our products and are dedicated to your success by providing free lifetime technical support. Our engineers and customer service teams are available to help, whether you're a potential new customer or a lifetime customer of Leer.

### 2. CONSTRUCTION FEATURES

- **Patented Construction Features** - All steel construction with no fasteners, welding, or adhesives. The offset seams are precision machine formed, resulting in water-tight lock-form seams that create a stronger and more durable merchandiser. This increases longevity by reducing moisture penetration into the insulation.
- **High R-Values** - Increased insulation to reduce heat infiltration into the unit - resulting in consistent and optimal temperatures of 16°F - 24°F. There's 2.5" of high-performance, eco-friendly, insulation in the ceiling and walls, and 3" of insulation in the floor.
- **Rust Resistant** - The exterior of the merchandiser is finished with a two-part primer/top coat all-weather paint to provide superior resistance to humidity, corrosion, and other weather conditions.

### 3. DOOR FEATURES

- **High-Impact Breaker Strip** - High-impact breaker strip, located around the perimeter of the door jamb, durable enough to withstand excessive wear and tear and provide a thermal break between the merchandiser interior and exterior.
- **Aluminum Door Frame** - The glass is encased in a long-lasting, durable, light-weight, aluminum frame.
- **Insulated Tempered Glass** - The doors contain argon-filled insulated tempered glass. The argon insulation decreases the merchandisers' U-Value, which is essentially the amount of solar heat transfer the glass allows into the unit.
- **Spring-Assisted Hinges** - The hinges are adjustable to ensure a lifetime of level, and solid sealing doors. Additionally, the springs help the door close securely and avoid accidentally being left open.
- **Chrome-Finish Hardware** - All hardware, including hinges and handles, have a chrome-finish to provide greater, strength durability, resistance to corrosion, and aesthetics.
- **Large Door Openings** - Oversized door openings for increased view and accessibility of the ice, and ease of merchandising during restock.

### 4. INTERIOR FEATURES

- **High-End Interior Finish** - Bright white interior finish.
- **Interior Lighting** - Standard with energy efficient LED lighting to help showcase the ice.

### 5. REFRIGERATION FEATURES

- **Serviceability** - On Automatic Defrost units, the drop-down evaporator allows for easier troubleshooting, maintenance, and servicing.
- **Full Top and Compressor Cover** - Standard and provide air flow for better cooling of the condenser and compressor. It's also a layer of protection from harmful foreign objects.
- **Intelligent Electronic Controls** - Electronic controls feature a digital display, factory preset advanced custom settings, and built-in intelligence to ensure your merchandiser will consistently operate at the optimal settings for your environmental needs.



**VIDEO LIBRARY** [leerinc.com/video-library](http://leerinc.com/video-library)







INDOOR ICE MERCHANDISERS

INDOOR ICE MERCHANDISERS



MODEL 30



MODEL 40



MODEL 60



MODEL 64



MODEL 65



MODEL 75



MODEL 85



MODEL 100



MODEL 115  
CORNER  
REFRIGERATION



MODEL 120



MODEL 150  
CORNER  
REFRIGERATION



MODEL 155

|                               | Model 30           | Model 40           | Model 60           | Model 64           | Model 65           | Model 75           |
|-------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| STANDARD MODEL NUMBERS        |                    |                    |                    |                    |                    |                    |
| Auto Defrost - R404a:         | L030UAGE           | L040UAGE           | L060UAGE           | L064UAGE           | L065UAGE           | L075UAGE           |
| Cold Wall - R404a:            | L030UCGE           | L040UCGE           | L060UCGE           | L064UCGE           | L065UCGE           | L075UCGE           |
| Auto Defrost - R290:          | L030UAGP           | L040UAGP           | L060UAGP           | L064UAGP           | L065UAGP           | L075UAGP           |
| Cold Wall - R290:             | L030UCGP           | L040UCGP           | L060UCGP           | L064UCGP           | L065UCGP           | L075UCGP           |
| DIMENSIONS & CAPACITIES       |                    |                    |                    |                    |                    |                    |
| 7 lb. Bags - Auto Defrost:    | 80                 | 120                | 180                | 170                | 170                | 210                |
| 20 lb. Bags - Auto Defrost:   | 30                 | 45                 | 70                 | 65                 | 65                 | 80                 |
| 7 lb. Bags - Cold Wall:       | 80                 | 130                | 200                | 190                | 190                | 230                |
| 20 lb. Bags - Cold Wall:      | 30                 | 50                 | 80                 | 70                 | 70                 | 90                 |
| Approx. Interior Cubic Feet:  | 30                 | 40                 | 60                 | 65                 | 65                 | 75                 |
| Dimensions (W" x D" x H"):    | 36 x 30 x 76.5     | 50.5 x 30 x 76.5   | 73 x 30 x 76.5     | 64 x 35.5 x 76.5   | 64 x 35.5 x 76.5   | 73 x 35.5 x 76.5   |
| Door Size (W" x H"):          | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            |
| OPERATING TEMPERATURE         |                    |                    |                    |                    |                    |                    |
| (X°F - X°F):                  | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            |
| Control:                      | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control |
| PRODUCT WEIGHT                |                    |                    |                    |                    |                    |                    |
| Auto Defrost (lbs.):          | 345                | 405                | 545                | 490                | 490                | 585                |
| Cold Wall (lbs.):             | 330                | 370                | 510                | 455                | 455                | 550                |
| ELECTRICAL                    |                    |                    |                    |                    |                    |                    |
| Voltage (V/Hz):               | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           |
| Min. Circuit Required (Amps): | 15                 | 15                 | 15                 | 15                 | 15                 | 15                 |
| Auto Defrost (Amps):          | 6.3                | 6.3                | 10                 | 10                 | 6.3                | 10                 |
| Cold Wall (Amps):             | 6.3                | 6.3                | 10                 | 10                 | 6.3                | 10                 |
| 230V/50Hz Available:          | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       |
| OTHER                         |                    |                    |                    |                    |                    |                    |
| Compressor (HP):              | 1/3                | 1/3                | 1/2                | 1/2                | 1/3                | 1/2                |
| Refrigerant:                  | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        |
| Certifications:               | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        |
| DOE Compliant:                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| CARB Compliant:               | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         |
| NSF Available:                | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       |

|                               | Model 85           | Model 100          | Model 115          | Model 120          | Model 150          | Model 155          |
|-------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| STANDARD MODEL NUMBERS        |                    |                    |                    |                    |                    |                    |
| Auto Defrost - R404a:         | L085UAGE           | L100UAGE           | CR115UAGX          | TD120UAGX          | CR150UAGX          | L155UAGE           |
| Cold Wall - R404a:            | L085UCGE           | L100UCGE           | N/A                | N/A                | N/A                | N/A                |
| Auto Defrost - R290:          | L085UAGP           | L100UAGP           | CR115UAGP          | TD120UAGP          | CR150UAGP          | L155UAGP           |
| Cold Wall - R290:             | L085UCGP           | L100UCGP           | N/A                | N/A                | N/A                | N/A                |
| DIMENSIONS & CAPACITIES       |                    |                    |                    |                    |                    |                    |
| 7 lb. Bags - Auto Defrost:    | 230                | 260                | 290                | 310                | 360                | 390                |
| 20 lb. Bags - Auto Defrost:   | 90                 | 100                | 110                | 120                | 140                | 150                |
| 7 lb. Bags - Cold Wall:       | 260                | 290                | N/A                | N/A                | N/A                | N/A                |
| 20 lb. Bags - Cold Wall:      | 100                | 110                | N/A                | N/A                | N/A                | N/A                |
| Approx. Interior Cubic Feet:  | 85                 | 100                | 115                | 120                | 150                | 155                |
| Dimensions (W" x D" x H"):    | 84 x 35.5 x 76.5   | 94 x 35.5 x 76.5   | 72 x 48 x 75       | 72 x 48 x 88       | 96 x 48 x 75       | 96 x 48 x 88       |
| Door Size (W" x H"):          | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            | 28 x 47            |
| OPERATING TEMPERATURE         |                    |                    |                    |                    |                    |                    |
| (X°F - X°F):                  | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            |
| Control:                      | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control |
| PRODUCT WEIGHT                |                    |                    |                    |                    |                    |                    |
| Auto Defrost (lbs.):          | 620                | 655                | 820                | 820                | 970                | 970                |
| Cold Wall (lbs.):             | 590                | 605                | N/A                | N/A                | N/A                | N/A                |
| ELECTRICAL                    |                    |                    |                    |                    |                    |                    |
| Voltage (V/Hz):               | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           |
| Min. Circuit Required (Amps): | 15                 | 15                 | 20                 | 20                 | 20                 | 20                 |
| Auto Defrost (Amps):          | 10                 | 10                 | 13                 | 13                 | 13                 | 13                 |
| Cold Wall (Amps):             | 10                 | 10                 | N/A                | N/A                | N/A                | N/A                |
| 230V/50Hz Available:          | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       |
| OTHER                         |                    |                    |                    |                    |                    |                    |
| Compressor (HP):              | 1/2                | 1/2                | 3/4                | 3/4                | 3/4                | 3/4                |
| Refrigerant:                  | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        |
| Certifications:               | UL, cUL, CE        | UL, cUL, CE        | UL, cUL            | UL, cUL            | UL, cUL            | UL, cUL            |
| DOE Compliant:                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| CARB Compliant:               | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         |
| NSF Available:                | Upon Request       | Upon Request       | No                 | No                 | No                 | No                 |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle

5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.





MODEL 30

MODEL 40

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L030UAGE |
| Cold Wall – R404a:    | L030UCGE |
| Auto Defrost – R290:  | L030UAGP |
| Cold Wall – R290:     | L030UCGP |

Dimensions & Capacities

|                              |                |
|------------------------------|----------------|
| 7 lb. Bags - Auto Defrost:   | 80             |
| 20 lb. Bags - Auto Defrost:  | 30             |
| 7 lb. Bags - Cold Wall:      | 80             |
| 20 lb. Bags - Cold Wall:     | 30             |
| Approx. Interior Cubic Feet: | 30             |
| Dimensions (W"xD"xH"):       | 36 x 30 x 76.5 |
| Door Size (W"x H"):          | 28 x 47        |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 345 |
| Cold Wall (lbs.):    | 330 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

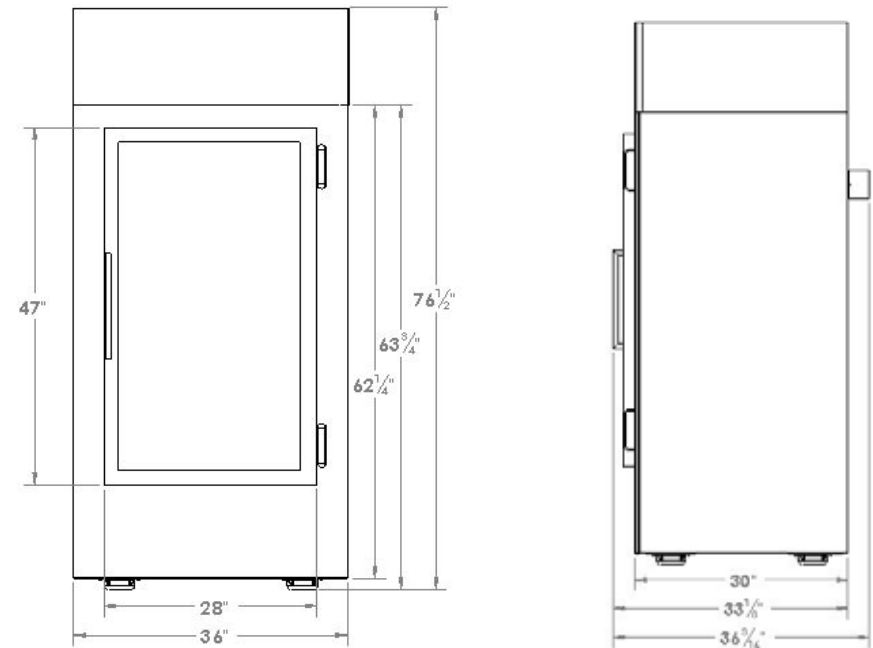

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L040UAGE |
| Cold Wall – R404a:    | L040UCGE |
| Auto Defrost – R290:  | L040UAGP |
| Cold Wall – R290:     | L040UCGP |

Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 120              |
| 20 lb. Bags - Auto Defrost:  | 45               |
| 7 lb. Bags - Cold Wall:      | 130              |
| 20 lb. Bags - Cold Wall:     | 50               |
| Approx. Interior Cubic Feet: | 40               |
| Dimensions (W"xD"xH"):       | 50.5 x 30 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16-24              |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 405 |
| Cold Wall (lbs.):    | 370 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

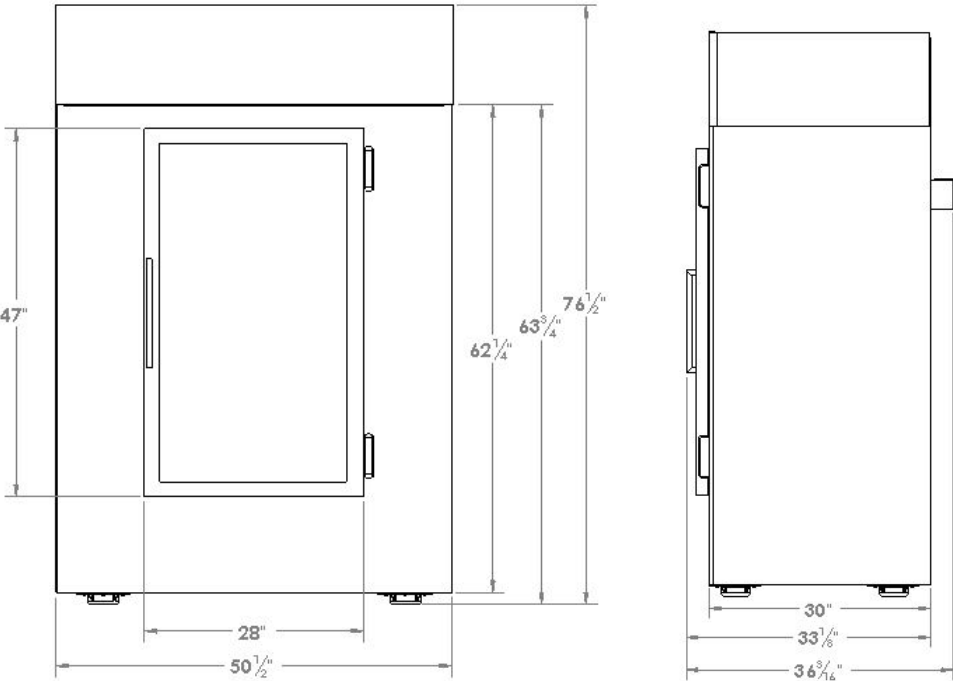



## MODEL 60

## MODEL 64

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L060UAGE |
| Cold Wall – R404a:    | L060UCGE |
| Auto Defrost – R290:  | L060UAGP |
| Cold Wall – R290:     | L060UCGP |

#### Dimensions & Capacities

|                              |                |
|------------------------------|----------------|
| 7 lb. Bags - Auto Defrost:   | 180            |
| 20 lb. Bags - Auto Defrost:  | 70             |
| 7 lb. Bags - Cold Wall:      | 200            |
| 20 lb. Bags - Cold Wall:     | 80             |
| Approx. Interior Cubic Feet: | 60             |
| Dimensions (W"xD"xH"):       | 73 x 30 x 76.5 |
| Door Size (W"x H"):          | 28 x 47        |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 545 |
| Cold Wall (lbs.):    | 510 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

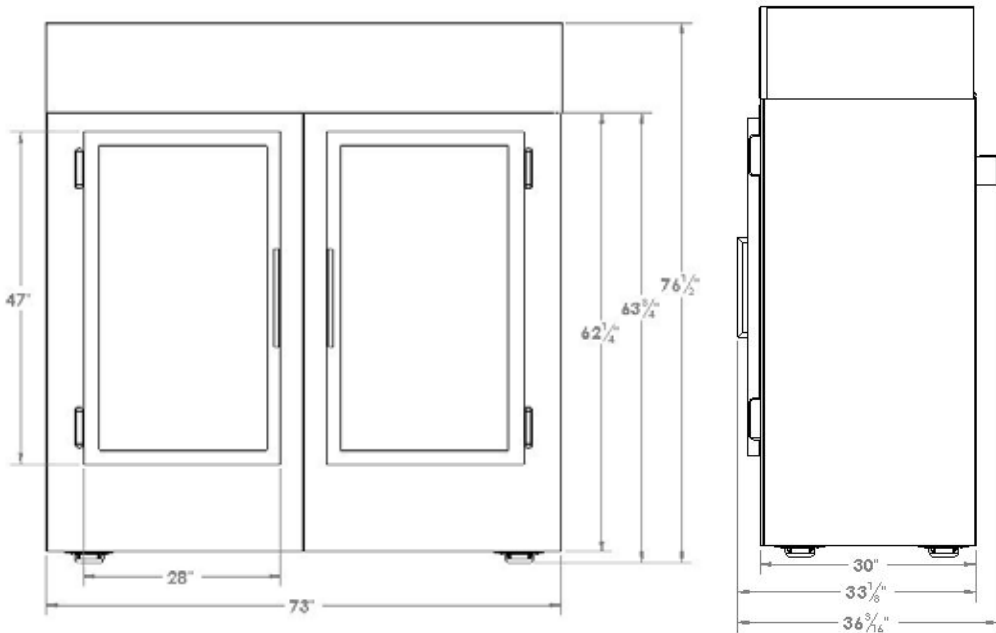

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L064UAGE |
| Cold Wall – R404a:    | L064UCGE |
| Auto Defrost – R290:  | L064UAGP |
| Cold Wall – R290:     | L064UCGP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 170              |
| 20 lb. Bags - Auto Defrost:  | 65               |
| 7 lb. Bags - Cold Wall:      | 190              |
| 20 lb. Bags - Cold Wall:     | 70               |
| Approx. Interior Cubic Feet: | 65               |
| Dimensions (W"xD"xH"):       | 64 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 490 |
| Cold Wall (lbs.):    | 455 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

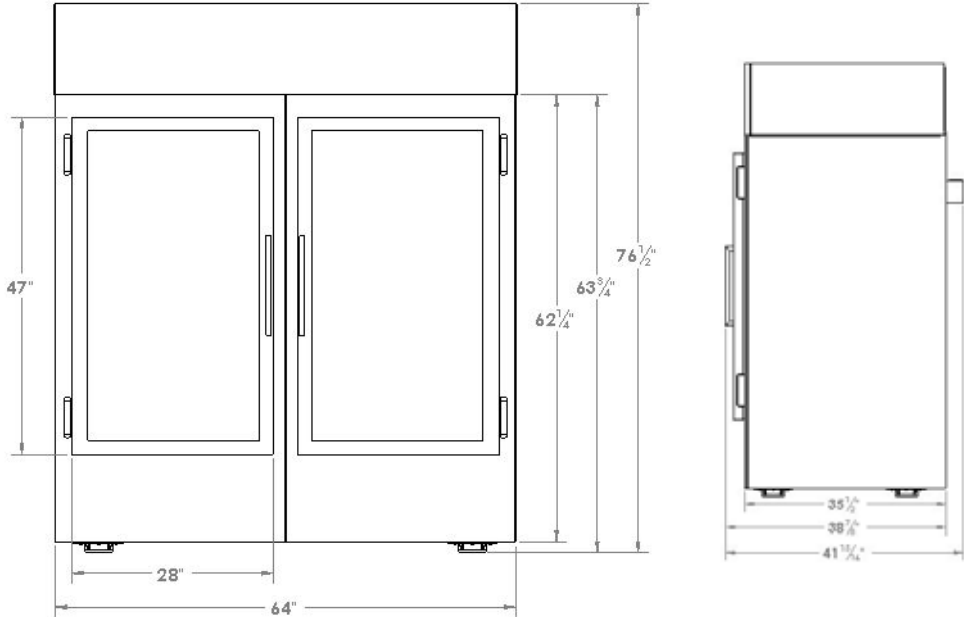





## MODEL 65

## MODEL 75

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L065UAGE |
| Cold Wall – R404a:    | L065UCGE |
| Auto Defrost – R290:  | L065UAGP |
| Cold Wall – R290:     | L065UCGP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 170              |
| 20 lb. Bags - Auto Defrost:  | 65               |
| 7 lb. Bags - Cold Wall:      | 190              |
| 20 lb. Bags - Cold Wall:     | 70               |
| Approx. Interior Cubic Feet: | 65               |
| Dimensions (W"xD"xH"):       | 64 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 490 |
| Cold Wall (lbs.):    | 455 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

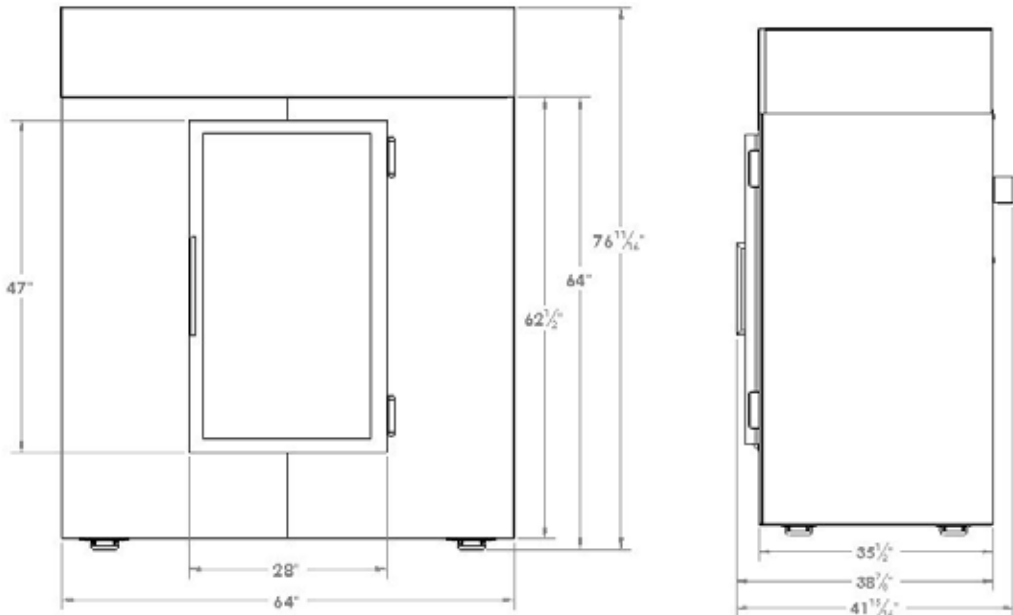

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L075UAGE |
| Cold Wall – R404a:    | L075UCGE |
| Auto Defrost – R290:  | L075UAGP |
| Cold Wall – R290:     | L075UCGP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 210              |
| 20 lb. Bags - Auto Defrost:  | 80               |
| 7 lb. Bags - Cold Wall:      | 230              |
| 20 lb. Bags - Cold Wall:     | 90               |
| Approx. Interior Cubic Feet: | 75               |
| Dimensions (W"xD"xH"):       | 73 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 585 |
| Cold Wall (lbs.):    | 550 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

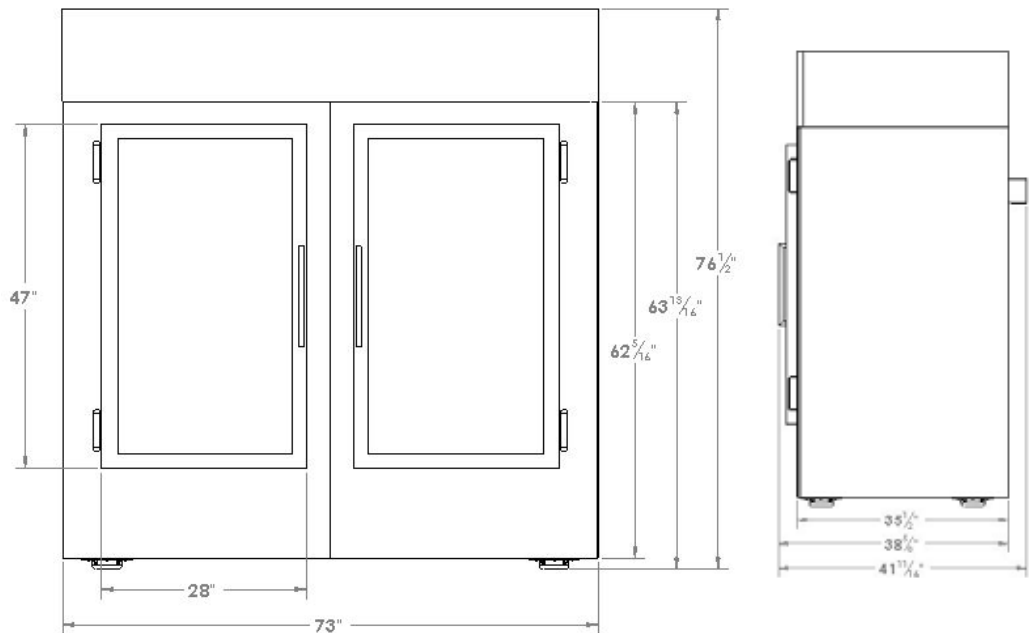



## MODEL 85

## MODEL 100

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L085UAGE |
| Cold Wall – R404a:    | L085UCGE |
| Auto Defrost – R290:  | L085UAGP |
| Cold Wall – R290:     | L085UCGP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 230              |
| 20 lb. Bags - Auto Defrost:  | 90               |
| 7 lb. Bags - Cold Wall:      | 260              |
| 20 lb. Bags - Cold Wall:     | 100              |
| Approx. Interior Cubic Feet: | 85               |
| Auto Defrost – R404a:        | L085UAGE         |
| Dimensions (W"xD"xH"):       | 84 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 620 |
| Cold Wall (lbs.):    | 590 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

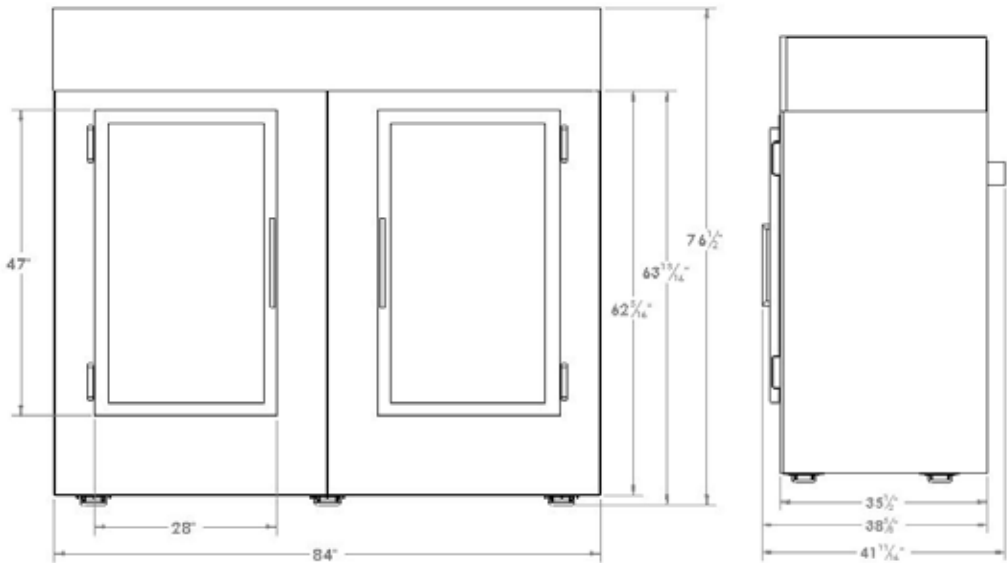

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L100UAGE |
| Cold Wall – R404a:    | L100UCGE |
| Auto Defrost – R290:  | L100UAGP |
| Cold Wall – R290:     | L100UCGP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 280              |
| 20 lb. Bags - Auto Defrost:  | 100              |
| 7 lb. Bags - Cold Wall:      | 290              |
| 20 lb. Bags - Cold Wall:     | 110              |
| Approx. Interior Cubic Feet: | 100              |
| Dimensions (W"xD"xH"):       | 94 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 28 x 47          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 -24             |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 655 |
| Cold Wall (lbs.):    | 605 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

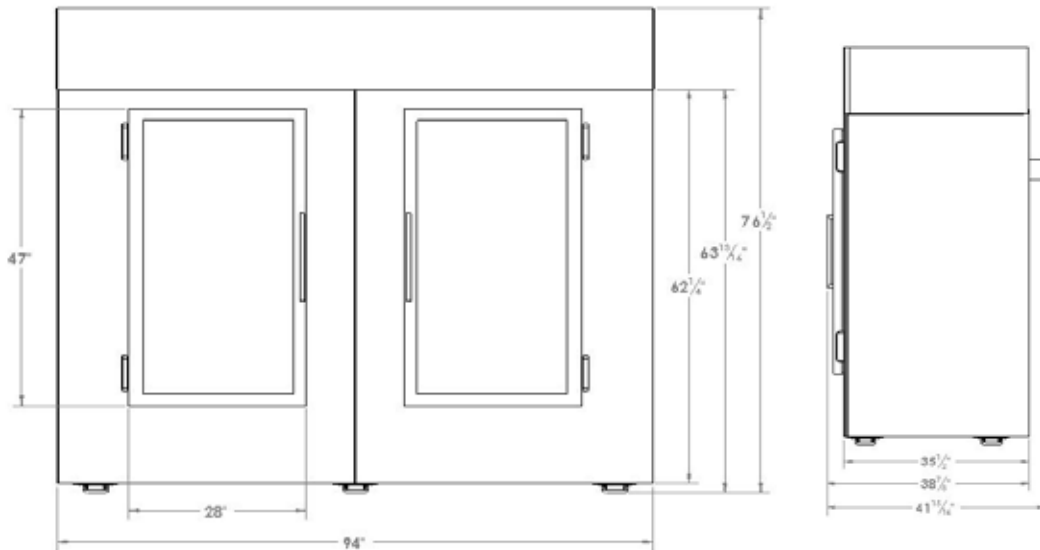





MODEL 115 CORNER REFRIGERATION



MODEL 120

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |           |
|-----------------------|-----------|
| Auto Defrost - R404a: | CR115UAGX |
| Auto Defrost - R290:  | CR115UAGP |

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 290          |
| 20 lb. Bags - Auto Defrost:  | 110          |
| Approx. Interior Cubic Feet: | 115          |
| Dimensions (W"xD"xH"):       | 72 x 48 x 75 |
| Door Size (W"x H"):          | 28 x 47      |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Mechanical |
| R290 Control:  | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 820 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

1. Add 3" to Depth for Condensate Evaporator Pan
2. Add 3.5" to Depth for Glass Door & Handle
3. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

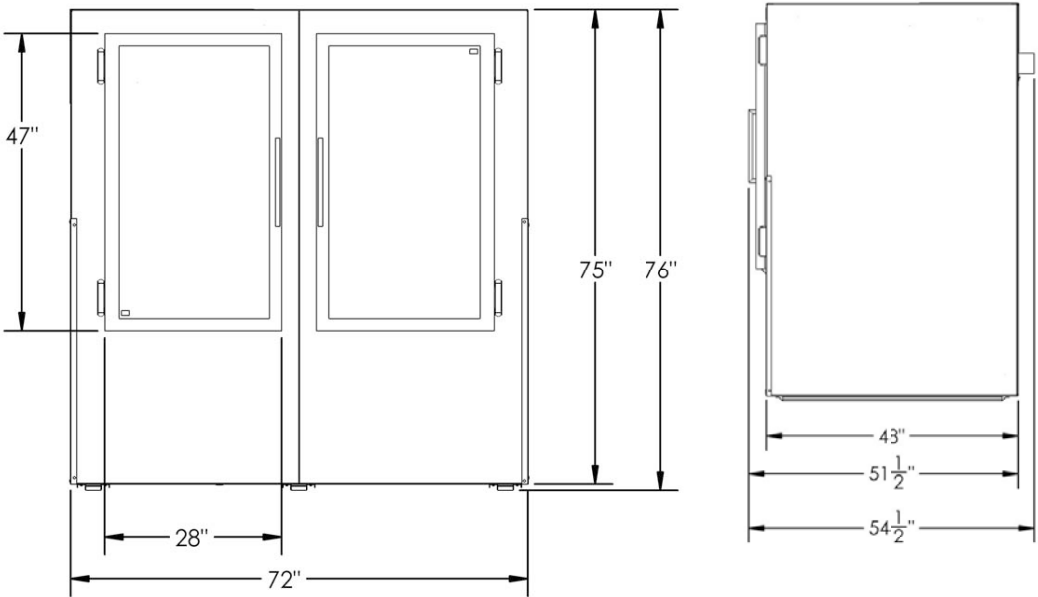

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |           |
|-----------------------|-----------|
| Auto Defrost - R404a: | TD120UAGX |
| Auto Defrost - R290:  | TD120UAGP |

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 310          |
| 20 lb. Bags - Auto Defrost:  | 120          |
| Approx. Interior Cubic Feet: | 120          |
| Dimensions (W"xD"xH"):       | 72 x 48 x 88 |
| Door Size (W"x H"):          | 28 x 47      |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Mechanical |
| R290 Control:  | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 820 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3.5" to Depth for Glass Door & Handle
4. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

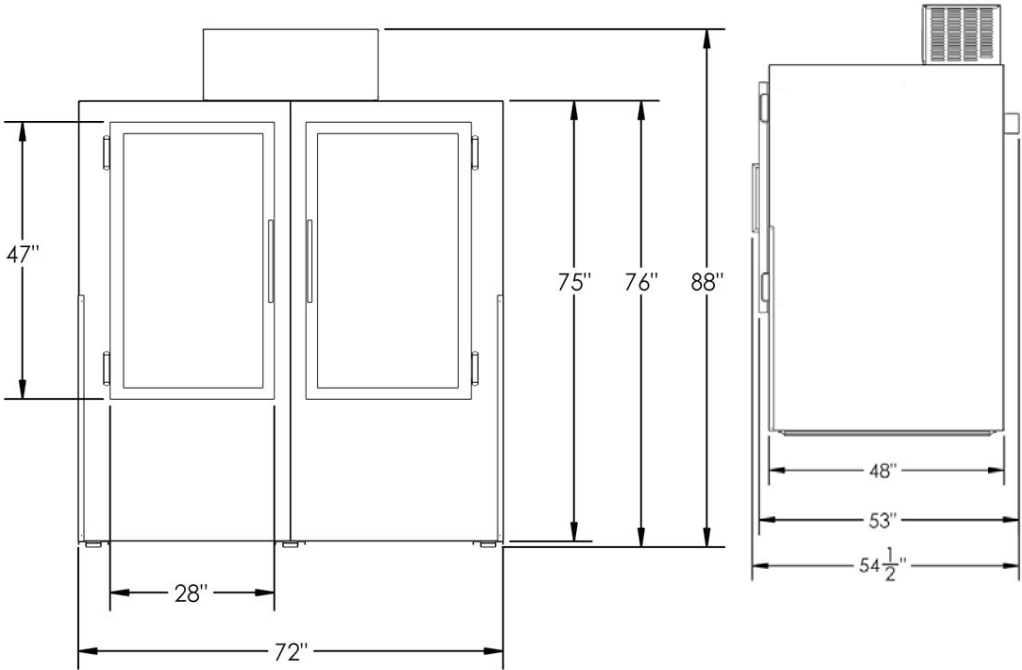





MODEL 150 CORNER REFRIGERATION

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |           |
|-----------------------|-----------|
| Auto Defrost - R404a: | CR150UAGX |
| Auto Defrost - R290:  | CR150UAGP |

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 360          |
| 20 lb. Bags - Auto Defrost:  | 140          |
| Approx. Interior Cubic Feet: | 150          |
| Dimensions (W"xD"xH"):       | 96 x 48 x 75 |
| Door Size (W"x H"):          | 28 x 47      |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Mechanical |
| R290 Control:  | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 970 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

- 1. Add 3" to Depth for Condensate Evaporator Pan
- 2. Add 3.5" to Depth for Glass Door & Handle
- 3. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

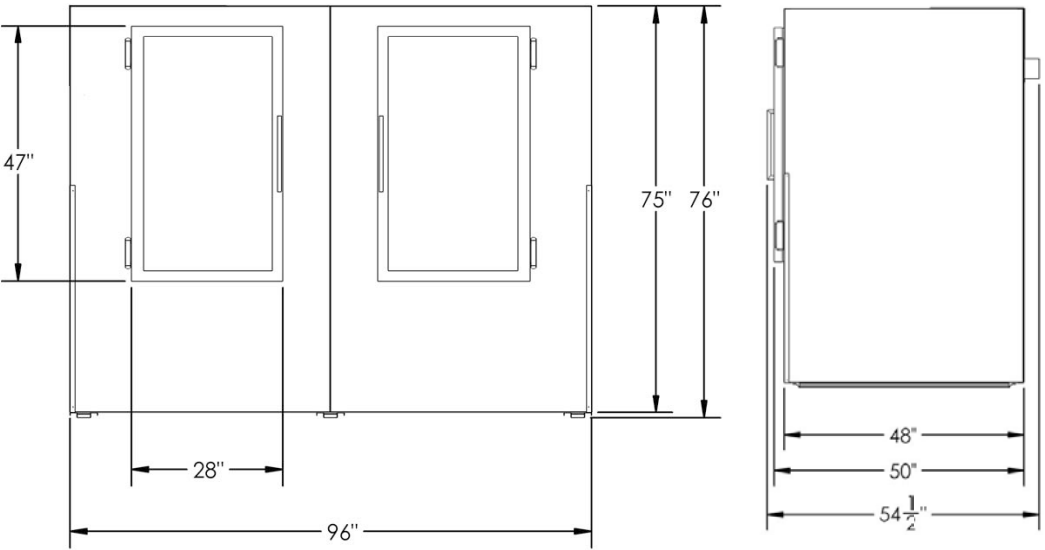

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost - R404a: | L155UAGX |
| Auto Defrost - R290:  | L155UAGP |

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 390          |
| 20 lb. Bags - Auto Defrost:  | 150          |
| Approx. Interior Cubic Feet: | 155          |
| Dimensions (W"xD"xH"):       | 96 x 48 x 88 |
| Door Size (W"x H"):          | 28 x 47      |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Mechanical |
| R290 Control:  | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 970 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |

Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |


- 1. Height includes Compressor
- 2. Add 3" to Depth for Condensate Evaporator Pan
- 3. Add 3.5" to Depth for Glass Door & Handle
- 4. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



MODEL 155



DIMENSIONAL DRAWINGS

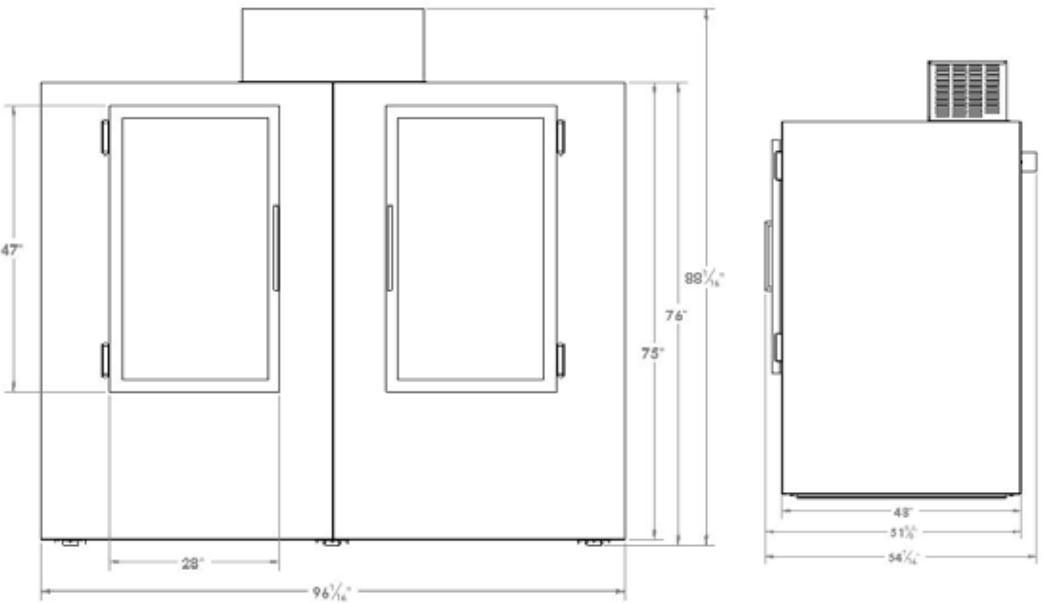





## OUTDOOR ICE MERCHANDISERS

### 1. LEER INC.

- **Your Partner in Temperature-Controlled Storage Solutions** - With over 65 years of industry expertise, innovation and focus on manufacturing excellence, we're confident our products feature industry leading efficiency, reliability, durability and longevity - delivering an unbeatable value to you and your company.
- **Made in Wisconsin, USA** - Manufactured under a strict quality control program to ensure our products are delivered right the first time, right every time.
- **Iconic Red Snow-Capped ICE Decals** - The trademarked ICE decals are a staple of the Packaged Ice Industry and Leer's unique signature that you can't get anywhere else.
- **We're With You Every Degree of the Way** - As an employee owned company, our success depends on your success. We stand behind our products and are dedicated to your success by providing free lifetime technical support. Our engineers and customer service teams are available to help, whether you're a potential new customer or a lifetime customer of Leer.

### 2. CONSTRUCTION FEATURES

- **Patented Construction Features** - All steel construction with no fasteners, welding, or adhesives. The offset seams are precision machine formed, resulting in water-tight lock-form seams that create a stronger and more durable merchandiser. This increases longevity by reducing moisture penetration into the insulation.
- **High R-Values** - Increased insulation to reduce heat infiltration into the unit - resulting in consistent and optimal temperatures of 16°F - 24°F. There's 2.5" of high-performance, eco-friendly, insulation in the ceiling and walls, and 3" of insulation in the floor.
- **Rust Resistant** - The exterior of the merchandiser is finished with a two-part primer/top coat all-weather paint to provide superior resistance to humidity, corrosion, and other weather conditions.

### 3. DOOR FEATURES

- **High-Impact Breaker Strip** - High-impact breaker strip, located around the perimeter of the door jamb, durable enough to withstand excessive wear and tear and provide a thermal break between the merchandiser interior and exterior.
- **Top-of-the-Line Door Gaskets** - The gaskets contain extra air chambers as well as a magnetic strip to provide a tight insulation around the doors. The gasket material is Santoprene®, which is designed to

withstand harsh outdoor climates without breaking or becoming brittle. Together these features improve the sealing performance and durability of the gaskets and merchandiser door. Therefore, making the merchandiser more energy efficient and better at keeping ice in premium condition.

- **Enhanced Door Frames** - The door frame is a combination of both rigid and flexible PVC, which provides better protection against dirt and water in the field and foam exposure during the manufacturing process.
- **Inset Doors** - The 2" inset doors provide greater insulation, reduce condensation, and improves the performance of merchandiser.
- **Rain Shield** - All doors contain a rain shield to divert water from dripping onto the doors or into the unit.
- **Steel Doors with Premium Paint** - Galvanized steel doors top coated with a premium exterior grade paint, which provides resistance to scratches, scuffs, dents, and protection from the outside elements.
- **Spring-Assisted Hinges** - The hinges are adjustable to ensure a lifetime of level, and solid sealing doors. Additionally, the springs help the door close securely and avoid accidentally being left open.
- **Chrome-Finish Hardware** - All hardware, including hinges and handles, have a chrome-finish to provide greater, strength durability, resistance to corrosion, and aesthetics.
- **Large Door Openings** - Oversized door openings for increased view and accessibility of the ice, and ease of merchandising during restock.
- **Locking Feature** - Doors contain a lockable hasp to protect from theft.

### 4. INTERIOR FEATURES

- **High-End Interior Finish** - Stucco-embossed galvanized steel interior finish.

### 5. REFRIGERATION FEATURES

- **Serviceability** - On Automatic Defrost units, the drop-down evaporator allows for easier troubleshooting, maintenance, and servicing.
- **Compressor Cover** - Standard and provides air flow for better cooling of the condenser and compressor. It's also a layer of protection from harmful foreign objects.
- **Intelligent Electronic Controls** - Electronic controls feature a digital display, factory preset advanced custom settings, and built-in intelligence to ensure your merchandiser will consistently operate at the optimal settings for your environmental needs.

**VIDEO LIBRARY** [leerinc.com/video-library](http://leerinc.com/video-library)







OUTDOOR ICE MERCHANTISERS



MODEL 30



MODEL 40



MODEL 40  
SLANT



MODEL 462  
LOW PROFILE



MODEL 60



MODEL 60 SLANT



MODEL 612 LOW  
PROFILE



MODEL 64



MODEL 65



MODEL 75



MODEL 75 SLANT



MODEL 85



MODEL 100



MODEL 115 CORNER  
REFRIGERATION



MODEL 120



MODEL 150 CORNER  
REFRIGERATION



MODEL 155

OUTDOOR ICE MERCHANTISERS

|                               | Model 30           | Model 40           | Model 40<br>Slant  | Model 462<br>Low Profile | Model 60           | Model 60<br>Slant  | Model 612<br>Low Profile | Model 64           | Model 65           | Model 75           | Model 75<br>Slant  | Model 85           | Model 100          | Model 115          | Model 120          | Model 150          | Model 155          |
|-------------------------------|--------------------|--------------------|--------------------|--------------------------|--------------------|--------------------|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| STANDARD MODEL NUMBERS        |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| Auto Defrost - R404a:         | L030UASE           | L040UASE           | L040SASE           | L462LASE                 | L060UASE           | L060SASE           | L612LASE                 | L064UASE           | L065UASE           | L075UASE           | L075SASE           | L085UASE           | L100UASE           | N/A                | N/A                | N/A                | L155UASE           |
| Cold Wall - R404a:            | L030UCSE           | L040UCSE           | L040SCSE           | L462LCSE                 | L060UCSE           | L060SCSE           | L612LCSE                 | L064UCSE           | L065UCSE           | L075UCSE           | L075SCSE           | L085UCSE           | L100UCSE           | N/A                | N/A                | N/A                | N/A                |
| Auto Defrost - R290:          | L030UASP           | L040UASP           | L040SASP           | L462LASP                 | L060UASP           | L060SASP           | L612LASP                 | L064UASP           | L065UASP           | L075UASP           | L075SASP           | L085UASP           | L100UASP           | CR115UASP          | TD120UASP          | CR150UASP          | L155UASP           |
| Cold Wall - R290:             | L030UCSP           | L040UCSP           | L040SCSP           | L462LCSP                 | L060UCSP           | L060SCSP           | L612LCSP                 | L064UCSP           | L065UCSP           | L075UCSP           | L075SCSP           | L085UCSP           | L100UCSP           | N/A                | N/A                | N/A                | N/A                |
| DIMENSIONS & CAPACITIES       |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| 7 lb. Bags - Auto Defrost:    | 80                 | 120                | 110                | 140                      | 180                | 180                | 170                      | 170                | 170                | 210                | 210                | 230                | 260                | 290                | 310                | 360                | 390                |
| 20 lb. Bags - Auto Defrost:   | 30                 | 45                 | 42                 | 55                       | 70                 | 70                 | 65                       | 65                 | 65                 | 80                 | 82                 | 90                 | 100                | 110                | 120                | 140                | 150                |
| 7 lb. Bags - Cold Wall:       | 80                 | 130                | 120                | 160                      | 200                | 200                | 180                      | 190                | 190                | 230                | 240                | 260                | 290                | N/A                | N/A                | N/A                | N/A                |
| 20 lb. Bags - Cold Wall:      | 30                 | 50                 | 50                 | 60                       | 80                 | 80                 | 70                       | 70                 | 70                 | 90                 | 90                 | 100                | 110                | N/A                | N/A                | N/A                | N/A                |
| Approx. Interior Cubic Feet:  | 30                 | 40                 | 40                 | 46                       | 60                 | 60                 | 61                       | 65                 | 65                 | 75                 | 75                 | 85                 | 100                | 115                | 120                | 150                | 155                |
| Dimensions (W" x D" x H"):    | 36 x 30 x 76.5     | 50.5 x 30 x 76.5   | 50.5 x 35.5 x 68.5 | 73 x 35.5 x 49.5         | 73 x 30 x 76.5     | 73 x 35.5 x 68.5   | 94 x 35.5 x 49.5         | 64 x 35.5 x 76.5   | 64 x 35.5 x 76.5   | 73 x 35.5 x 76.5   | 94 x 35.5 x 68.5   | 84 x 35.5 x 76.5   | 94 x 35.5 x 76.5   | 72 x 48 x 75       | 72 x 48 x 88       | 96 x 48 x 75       | 96 x 48 x 88       |
| Door Size (W" x H"):          | 27 x 46            | 27 x 46            | 27 x 27            | 27 x 27                  | 27 x 46            | 27 x 27            | 27 x 27                  | 27 x 46            | 27 x 46            | 27 x 46            | 27 x 27            | 27 x 46            | 27 x 46            | 27 x 46            | 27 x 46            | 27 x 46            | 27 x 46            |
| OPERATING TEMPERATURE         |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| (X°F - X°F):                  | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24                  | 16 - 24            | 16 - 24            | 16 - 24                  | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            | 16 - 24            |
| Control:                      | Electronic Control | Electronic Control | Electronic Control | Electronic Control       | Electronic Control | Electronic Control | Electronic Control       | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control | Electronic Control |
| PRODUCT WEIGHT                |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| Auto Defrost (lbs.):          | 305                | 350                | 345                | 455                      | 455                | 435                | 495                      | 430                | 430                | 490                | 520                | 545                | 560                | 820                | 820                | 970                | 970                |
| Cold Wall (lbs.):             | 280                | 325                | 320                | 425                      | 425                | 400                | 462                      | 405                | 405                | 450                | 480                | 505                | 530                | N/A                | N/A                | N/A                | N/A                |
| ELECTRICAL                    |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| Voltage (V/Hz):               | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60                 | 115 / 60           | 115 / 60           | 115 / 60                 | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           | 115 / 60           |
| Min. Circuit Required (Amps): | 15                 | 15                 | 15                 | 15                       | 15                 | 15                 | 15                       | 15                 | 15                 | 15                 | 15                 | 15                 | 15                 | 20                 | 20                 | 20                 | 20                 |
| Auto Defrost (Amps):          | 6.3                | 6.3                | 6.3                | 6.3                      | 6.3                | 6.3                | 6.3                      | 10                 | 6.3                | 10                 | 10                 | 10                 | 10                 | 13                 | 13                 | 13                 | 13                 |
| Cold Wall (Amps):             | 6.3                | 6.3                | 6.3                | 6.3                      | 6.3                | 6.3                | 6.3                      | 10                 | 6.3                | 10                 | 10                 | 10                 | 10                 | N/A                | N/A                | N/A                | N/A                |
| 230V/50Hz Available:          | Upon Request       | Upon Request       | Upon Request       | Upon Request             | Upon Request       | Upon Request       | Upon Request             | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       |
| OTHER                         |                    |                    |                    |                          |                    |                    |                          |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
| Compressor (HP):              | 1/3                | 1/3                | 1/3                | 1/3                      | 1/3                | 1/3                | 1/3                      | 1/2                | 1/3                | 1/2                | 1/2                | 1/2                | 1/2                | 3/4                | 3/4                | 3/4                | 3/4                |
| Refrigerant:                  | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290              | R404a, R290        | R404a, R290        | R404a, R290              | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R404a, R290        | R290               | R290               | R290               | R404a, R290        |
| Certifications:               | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE              | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE              | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL, CE        | UL, cUL            | UL, cUL            | UL, cUL            | UL, cUL            |
| DOE Compliant:                | Yes                | Yes                | Yes                | Yes                      | Yes                | Yes                | Yes                      | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| CARB Compliant:               | R290 Units         | R290 Units         | R290 Units         | R290 Units               | R290 Units         | R290 Units         | R290 Units               | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         | R290 Units         |
| NSF Available:                | Upon Request       | Upon Request       | Upon Request       | Upon Request             | Upon Request       | Upon Request       | Upon Request             | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | Upon Request       | No                 | No                 | No                 | No                 |

1. Height Includes Compressor  
2. Add 3" to Depth for Condensate Evaporator Pan  
3. Add 3" to Depth for Low Profile Raceway  
4. Add 3.5" to Depth for Glass Door & Handle  
5. Add 3" to Depth for Upright Solid Door & Handle  
6. Add 1" to Depth for Slant Solid Door & Handle  
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.





MODEL 30

MODEL 40

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L030UASE |
| Cold Wall – R404a:    | L030UCSE |
| Auto Defrost – R290:  | L030UASP |
| Cold Wall – R290:     | L030UCSP |

Dimensions & Capacities

|                              |                |
|------------------------------|----------------|
| 7 lb. Bags - Auto Defrost:   | 80             |
| 20 lb. Bags - Auto Defrost:  | 30             |
| 7 lb. Bags - Cold Wall:      | 80             |
| 20 lb. Bags - Cold Wall:     | 30             |
| Approx. Interior Cubic Feet: | 30             |
| Dimensions (W"xD"xH"):       | 36 x 30 x 76.5 |
| Door Size (W"x H"):          | 27 x 46        |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 305 |
| Cold Wall (lbs.):    | 280 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

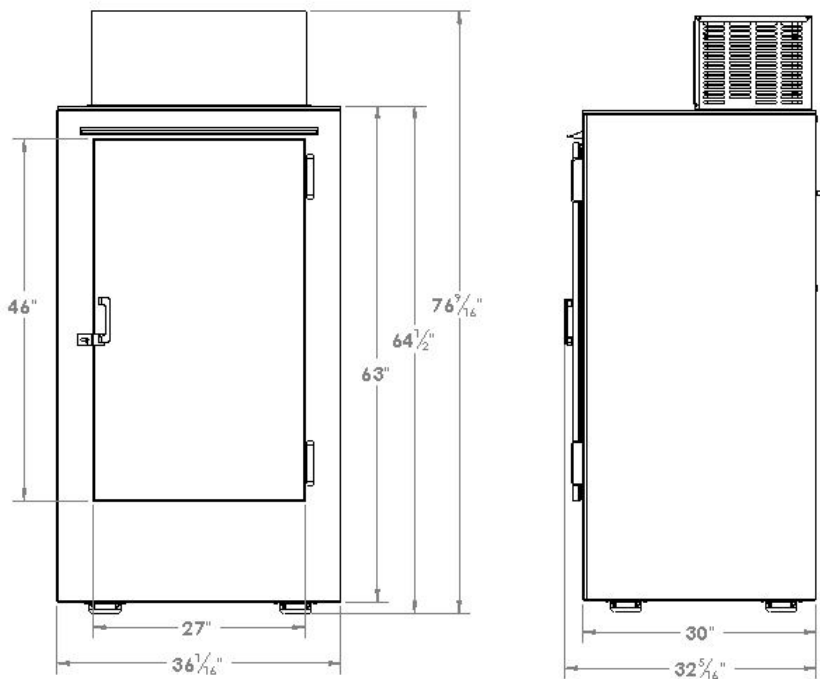

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L040UASE |
| Cold Wall – R404a:    | L040UCSE |
| Auto Defrost – R290:  | L040UASP |
| Cold Wall – R290:     | L040UCSP |

Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 120              |
| 20 lb. Bags - Auto Defrost:  | 45               |
| 7 lb. Bags - Cold Wall:      | 130              |
| 20 lb. Bags - Cold Wall:     | 50               |
| Approx. Interior Cubic Feet: | 40               |
| Dimensions (W"xD"xH"):       | 50.5 x 30 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 350 |
| Cold Wall (lbs.):    | 325 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

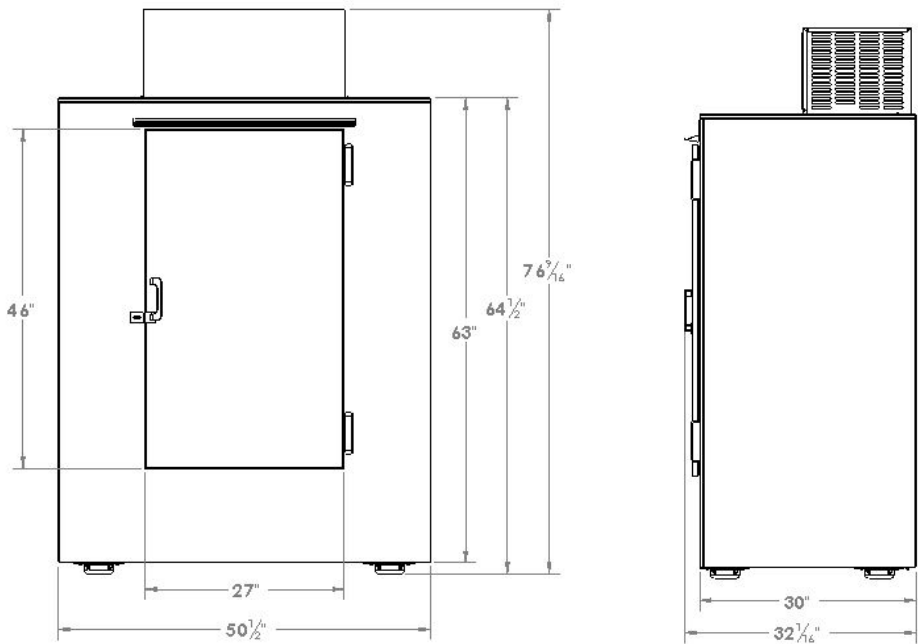





## MODEL 40 SLANT

## MODEL 462 LOW PROFILE

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L040SASE |
| Cold Wall – R404a:    | L040SCSE |
| Auto Defrost – R290:  | L040SASP |
| Cold Wall – R290:     | L040SCSP |

#### Dimensions & Capacities

|                              |                    |
|------------------------------|--------------------|
| 7 lb. Bags - Auto Defrost:   | 110                |
| 20 lb. Bags - Auto Defrost:  | 42                 |
| 7 lb. Bags - Cold Wall:      | 120                |
| 20 lb. Bags - Cold Wall:     | 50                 |
| Approx. Interior Cubic Feet: | 40                 |
| Dimensions (W"xD"xH"):       | 50.5 x 35.5 x 68.5 |
| Door Size (W"x H"):          | 27 x 27            |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 345 |
| Cold Wall (lbs.):    | 320 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

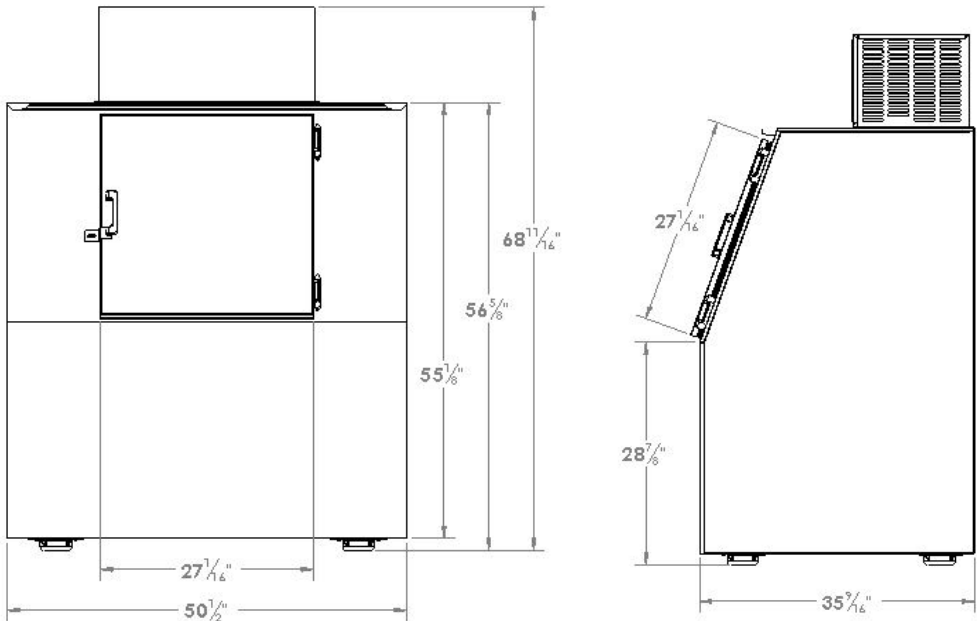

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L462LASE |
| Cold Wall – R404a:    | L462LCSE |
| Auto Defrost – R290:  | L462LASP |
| Cold Wall – R290:     | L462LCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 140              |
| 20 lb. Bags - Auto Defrost:  | 55               |
| 7 lb. Bags - Cold Wall:      | 160              |
| 20 lb. Bags - Cold Wall:     | 60               |
| Approx. Interior Cubic Feet: | 46               |
| Dimensions (W"xD"xH"):       | 73 x 35.5 x 49.5 |
| Door Size (W"x H"):          | 27 x 27          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 455 |
| Cold Wall (lbs.):    | 425 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |

#### Other


|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.

## MODEL 462 LOW PROFILE



### DIMENSIONAL DRAWINGS

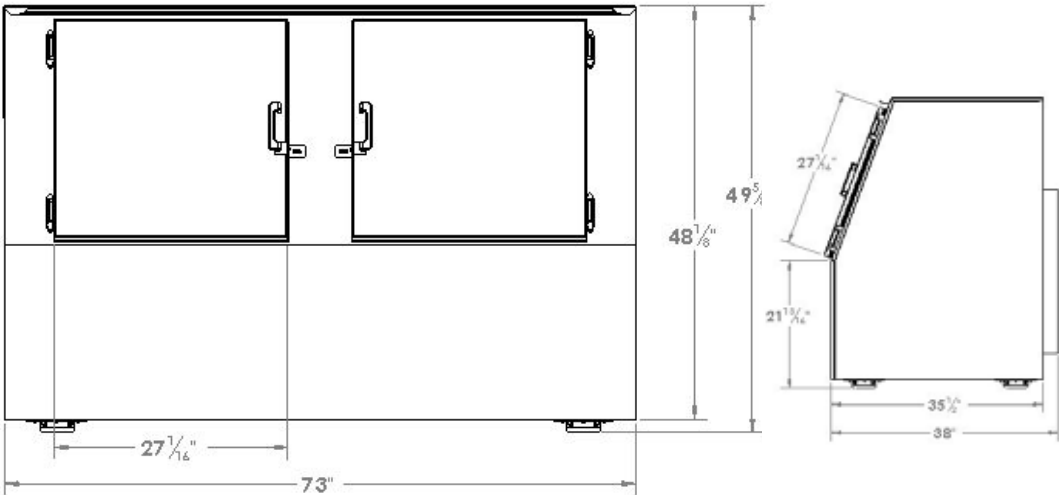





## MODEL 60

## MODEL 60 SLANT

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L060UASE |
| Cold Wall – R404a:    | L060UCSE |
| Auto Defrost – R290:  | L060UASP |
| Cold Wall – R290:     | L060UCSP |

#### Dimensions & Capacities

|                              |                |
|------------------------------|----------------|
| 7 lb. Bags - Auto Defrost:   | 180            |
| 20 lb. Bags - Auto Defrost:  | 70             |
| 7 lb. Bags - Cold Wall:      | 200            |
| 20 lb. Bags - Cold Wall:     | 80             |
| Approx. Interior Cubic Feet: | 60             |
| Dimensions (W"xD"xH"):       | 73 x 30 x 76.5 |
| Door Size (W"x H"):          | 27 x 46        |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 455 |
| Cold Wall (lbs.):    | 425 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

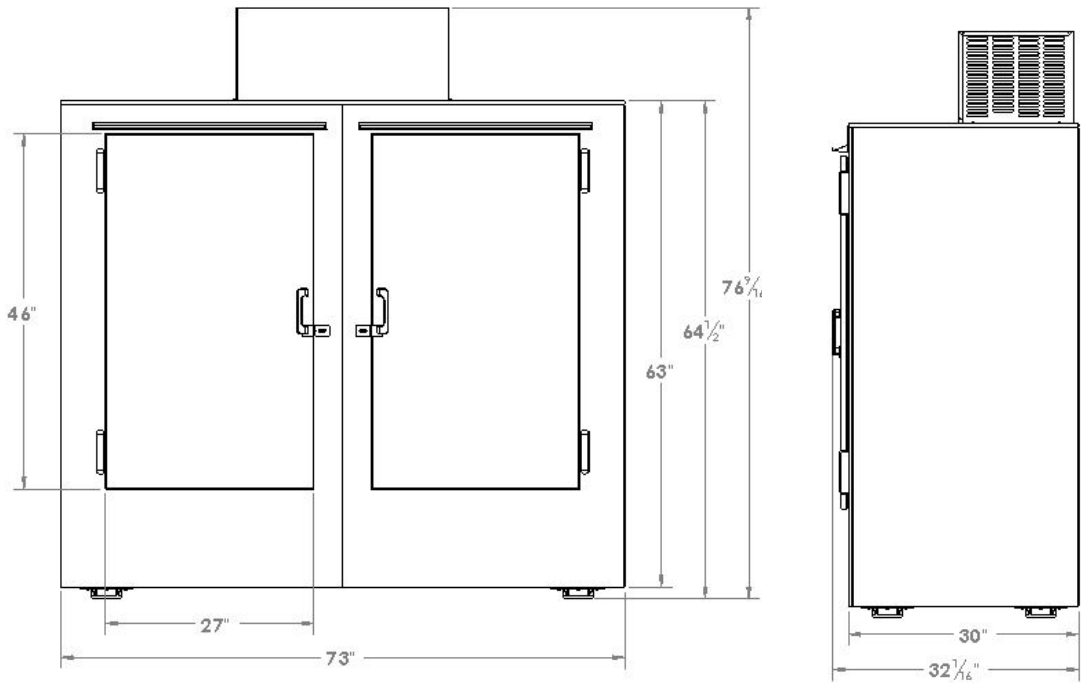

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L060SASE |
| Cold Wall – R404a:    | L060SCSE |
| Auto Defrost – R290:  | L060SASP |
| Cold Wall – R290:     | L060SCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 180              |
| 20 lb. Bags - Auto Defrost:  | 70               |
| 7 lb. Bags - Cold Wall:      | 200              |
| 20 lb. Bags - Cold Wall:     | 80               |
| Approx. Interior Cubic Feet: | 60               |
| Dimensions (W"xD"xH"):       | 73 x 35.5 x 68.5 |
| Door Size (W"x H"):          | 27 x 27          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 435 |
| Cold Wall (lbs.):    | 400 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

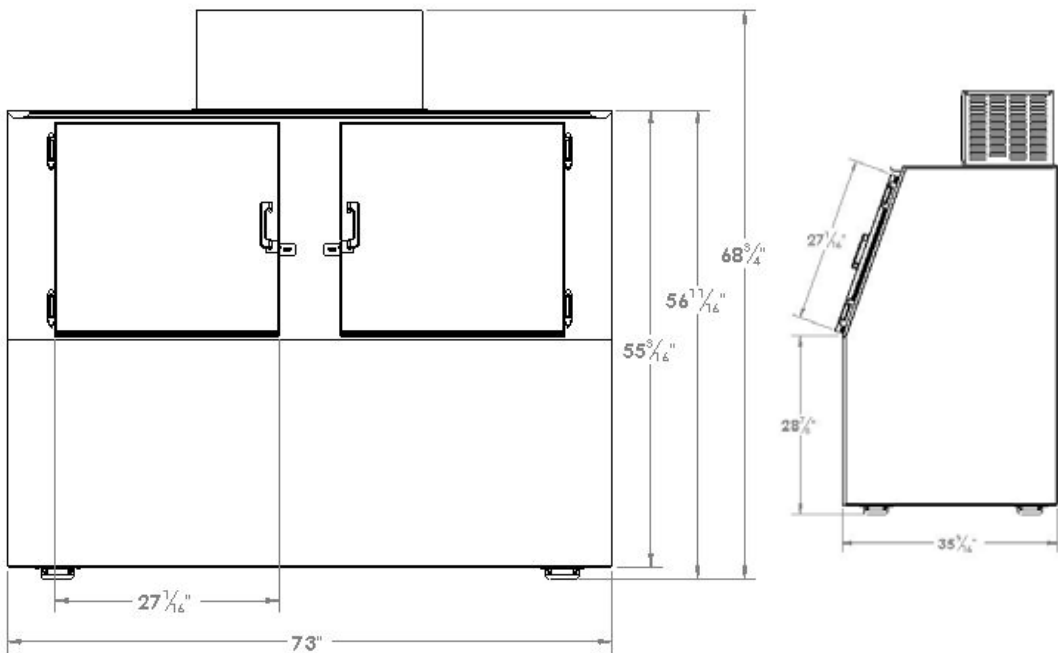





MODEL 612 LOW PROFILE

MODEL 64

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L612LASE |
| Cold Wall – R404a:    | L612LCSE |
| Auto Defrost – R290:  | L612LASP |
| Cold Wall – R290:     | L612LCSP |

Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 170              |
| 20 lb. Bags - Auto Defrost:  | 65               |
| 7 lb. Bags - Cold Wall:      | 180              |
| 20 lb. Bags - Cold Wall:     | 70               |
| Approx. Interior Cubic Feet: | 61               |
| Dimensions (W"xD"xH"):       | 94 x 35.5 x 49.5 |
| Door Size (W"x H"):          | 27 x 27          |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 495 |
| Cold Wall (lbs.):    | 462 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

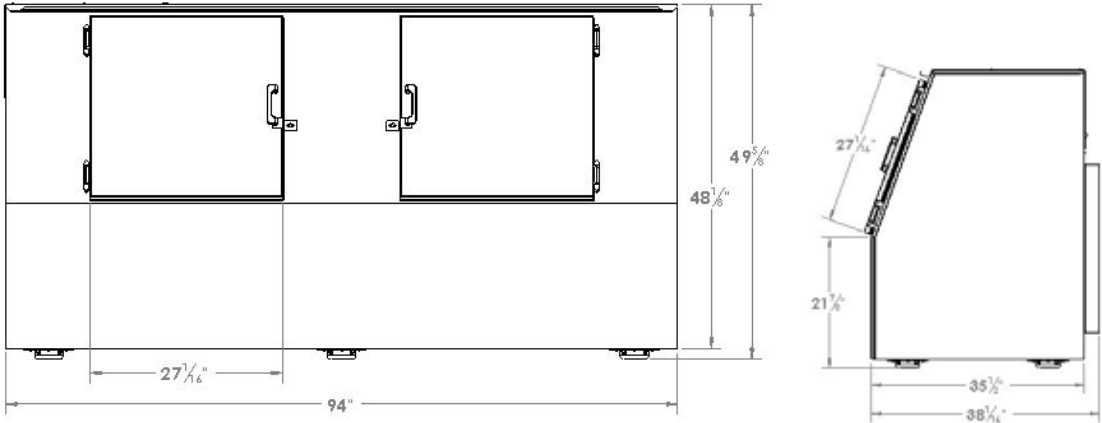

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L064UASE |
| Cold Wall – R404a:    | L064UCSE |
| Auto Defrost – R290:  | L064UASP |
| Cold Wall – R290:     | L064UCSP |

Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 170              |
| 20 lb. Bags - Auto Defrost:  | 65               |
| 7 lb. Bags - Cold Wall:      | 190              |
| 20 lb. Bags - Cold Wall:     | 70               |
| Approx. Interior Cubic Feet: | 65               |
| Dimensions (W"xD"xH"):       | 64 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 430 |
| Cold Wall (lbs.):    | 405 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

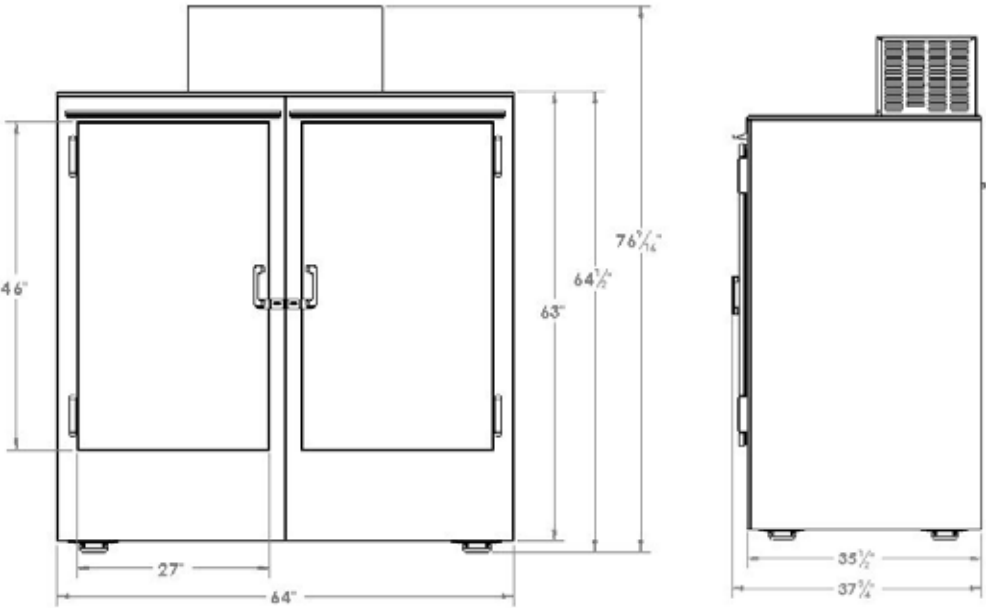





## MODEL 65

## MODEL 75

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L065UASE |
| Cold Wall – R404a:    | L065UCSE |
| Auto Defrost – R290:  | L065UASP |
| Cold Wall – R290:     | L065UCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 170              |
| 20 lb. Bags - Auto Defrost:  | 65               |
| 7 lb. Bags - Cold Wall:      | 190              |
| 20 lb. Bags - Cold Wall:     | 70               |
| Approx. Interior Cubic Feet: | 65               |
| Dimensions (W"xD"xH"):       | 64 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 430 |
| Cold Wall (lbs.):    | 405 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 6.3          |
| Cold Wall (Amps):             | 6.3          |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/3          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

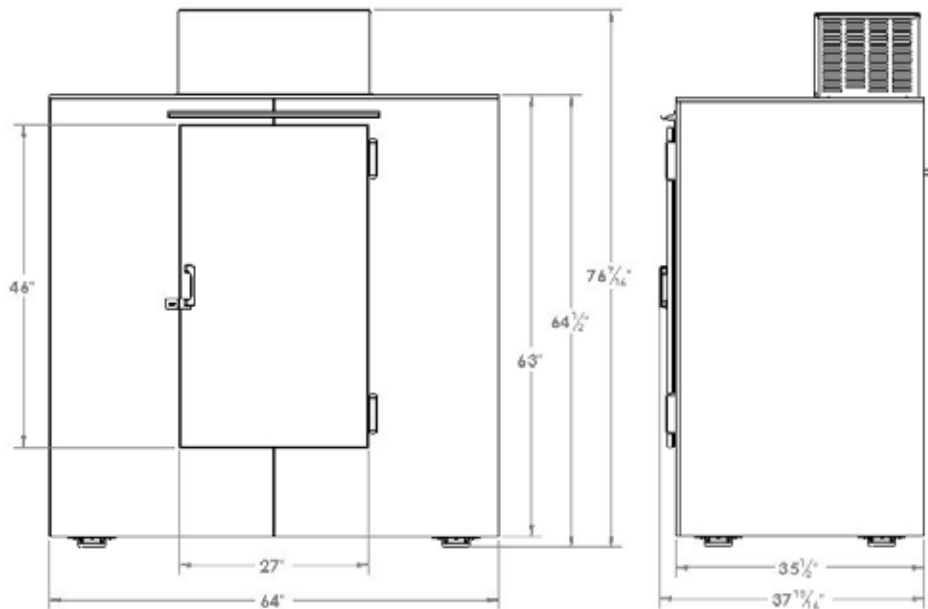

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L075UASE |
| Cold Wall – R404a:    | L075UCSE |
| Auto Defrost – R290:  | L075UASP |
| Cold Wall – R290:     | L075UCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 210              |
| 20 lb. Bags - Auto Defrost:  | 80               |
| 7 lb. Bags - Cold Wall:      | 230              |
| 20 lb. Bags - Cold Wall:     | 90               |
| Approx. Interior Cubic Feet: | 75               |
| Dimensions (W"xD"xH"):       | 73 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 490 |
| Cold Wall (lbs.):    | 450 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

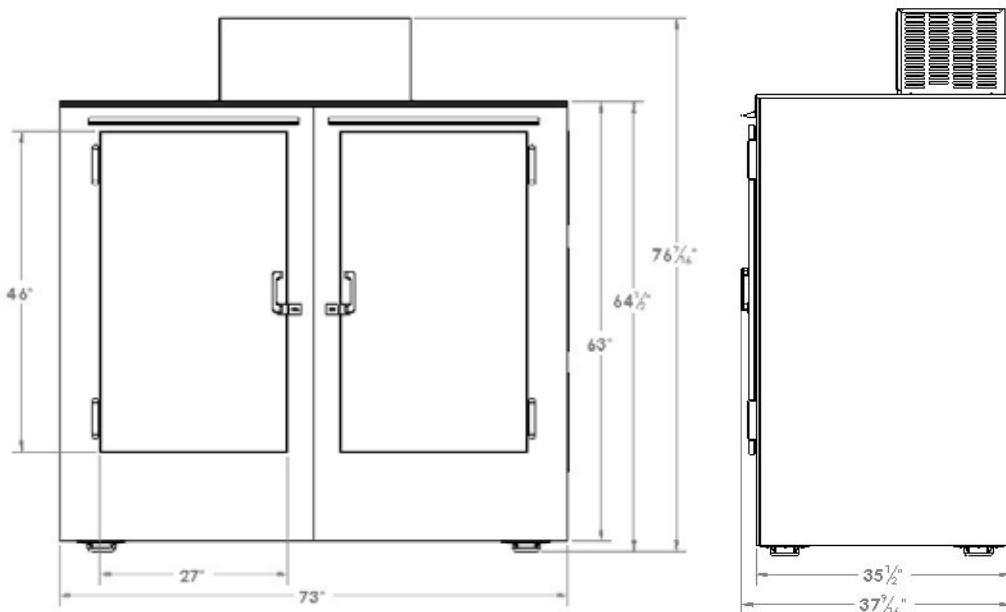





## MODEL 75 SLANT

## MODEL 85

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L075SASE |
| Cold Wall – R404a:    | L075SCSE |
| Auto Defrost – R290:  | L075SASP |
| Cold Wall – R290:     | L075SCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 210              |
| 20 lb. Bags - Auto Defrost:  | 82               |
| 7 lb. Bags - Cold Wall:      | 240              |
| 20 lb. Bags - Cold Wall:     | 90               |
| Approx. Interior Cubic Feet: | 75               |
| Dimensions (W"xD"xH"):       | 94 x 35.5 x 68.5 |
| Door Size (W"x H"):          | 27 x 27          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 520 |
| Cold Wall (lbs.):    | 480 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

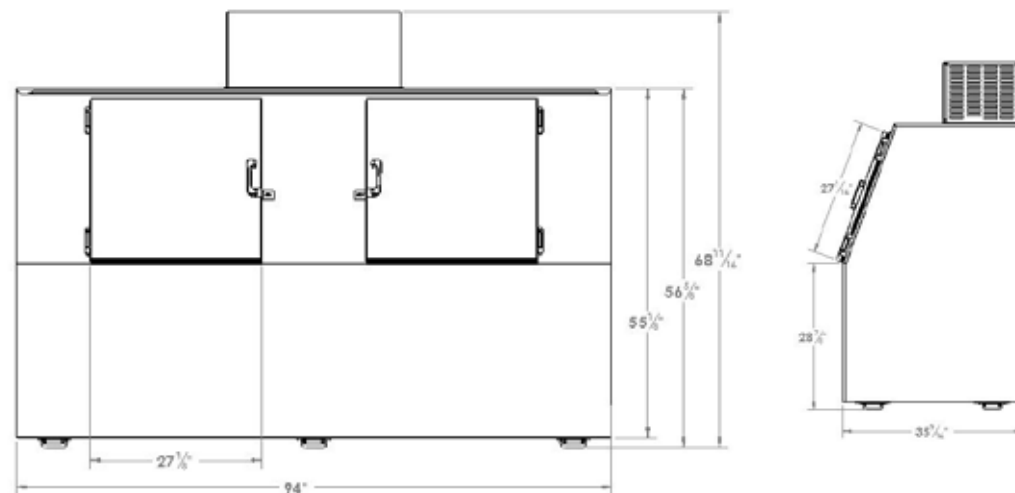

### PRODUCT SPECIFICATIONS

#### Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L085UASE |
| Cold Wall – R404a:    | L085UCSE |
| Auto Defrost – R290:  | L085UASP |
| Cold Wall – R290:     | L085UCSP |

#### Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 230              |
| 20 lb. Bags - Auto Defrost:  | 90               |
| 7 lb. Bags - Cold Wall:      | 260              |
| 20 lb. Bags - Cold Wall:     | 100              |
| Approx. Interior Cubic Feet: | 85               |
| Dimensions (W"xD"xH"):       | 84 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

#### Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

#### Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 545 |
| Cold Wall (lbs.):    | 505 |

#### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


#### Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



### DIMENSIONAL DRAWINGS

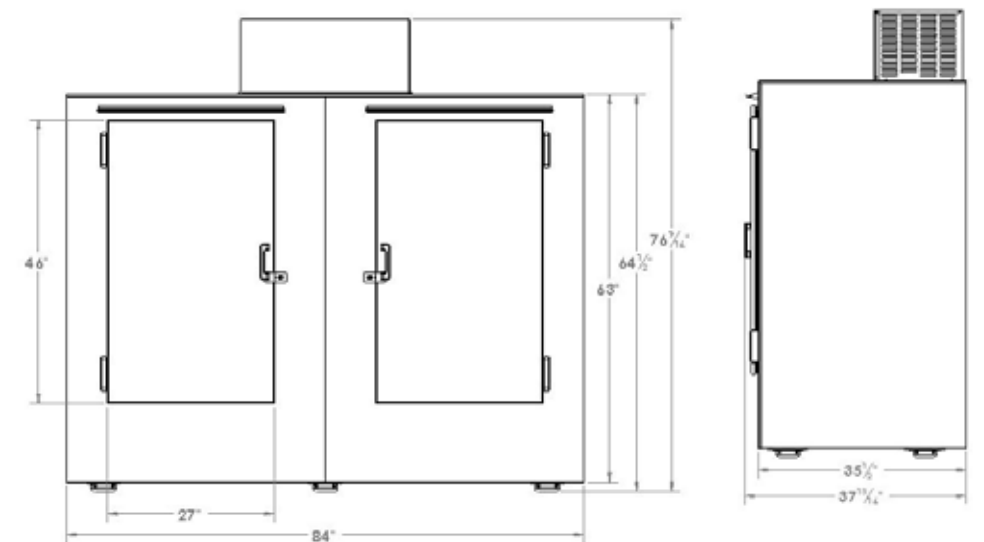



MODEL 100



MODEL 115 CORNER REFRIGERATION

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost – R404a: | L100UASE |
| Cold Wall – R404a:    | L100UCSE |
| Auto Defrost – R290:  | L100UASP |
| Cold Wall – R290:     | L100UCSP |

Dimensions & Capacities

|                              |                  |
|------------------------------|------------------|
| 7 lb. Bags - Auto Defrost:   | 260              |
| 20 lb. Bags - Auto Defrost:  | 100              |
| 7 lb. Bags - Cold Wall:      | 290              |
| 20 lb. Bags - Cold Wall:     | 110              |
| Approx. Interior Cubic Feet: | 100              |
| Dimensions (W"xD"xH"):       | 94 x 35.5 x 76.5 |
| Door Size (W"x H"):          | 27 x 46          |

Operating Temperature

|              |                    |
|--------------|--------------------|
| (X°F - X°F): | 16 - 24            |
| Control:     | Electronic Control |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 560 |
| Cold Wall (lbs.):    | 530 |

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115 / 60     |
| Min. Circuit Required (Amps): | 15           |
| Auto Defrost (Amps):          | 10           |
| Cold Wall (Amps):             | 10           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |              |
|------------------|--------------|
| Compressor (HP): | 1/2          |
| Refrigerant:     | R404a, R290  |
| Certifications:  | UL, cUL, CE  |
| DOE Compliant:   | Yes          |
| CARB Compliant:  | Upon Request |
| NSF Available:   | Upon Request |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3" to Depth for Low Profile Raceway
4. Add 3.5" to Depth for Glass Door & Handle
5. Add 3" to Depth for Upright Solid Door & Handle
6. Add 1" to Depth for Slant Solid Door & Handle
7. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

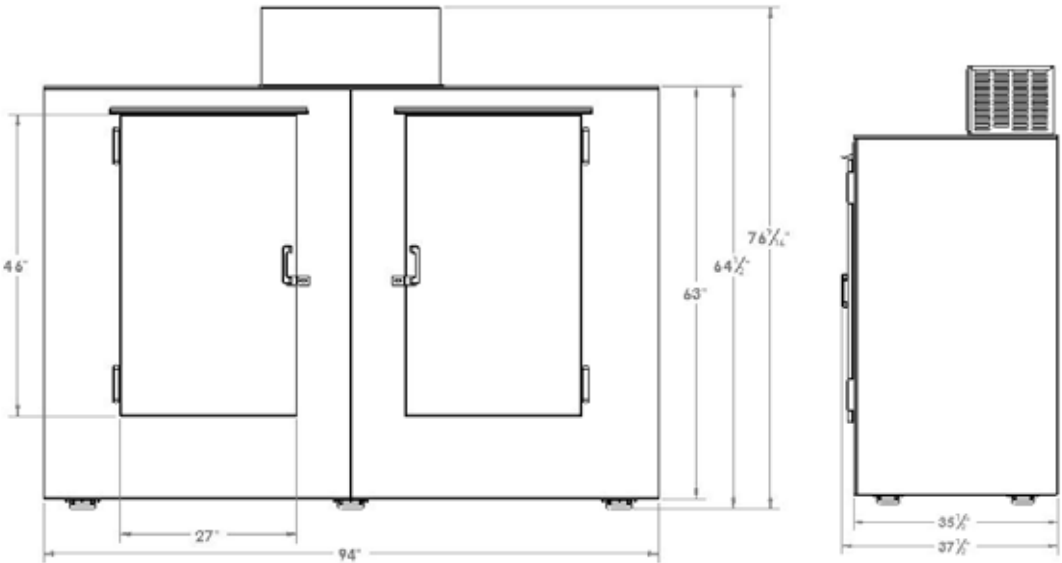

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                      |           |
|----------------------|-----------|
| Auto Defrost - R290: | CR115UASP |
|----------------------|-----------|

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 290          |
| 20 lb. Bags - Auto Defrost:  | 110          |
| Approx. Interior Cubic Feet: | 115          |
| Dimensions (W"xD"xH"):       | 72 x 48 x 75 |
| Door Size (W"x H"):          | 27 x 46      |

Operating Temperature

|               |            |
|---------------|------------|
| (X°F - X°F):  | 16 -24     |
| R290 Control: | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 820 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |            |
|------------------|------------|
| Compressor (HP): | 3/4        |
| Refrigerant:     | R290       |
| Certifications:  | UL, cUL    |
| DOE Compliant:   | Yes        |
| CARB Complaint:  | R290 Units |
| NSF Available:   | No         |

1. Add 3" to Depth for Upright Solid Door & Handle
2. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

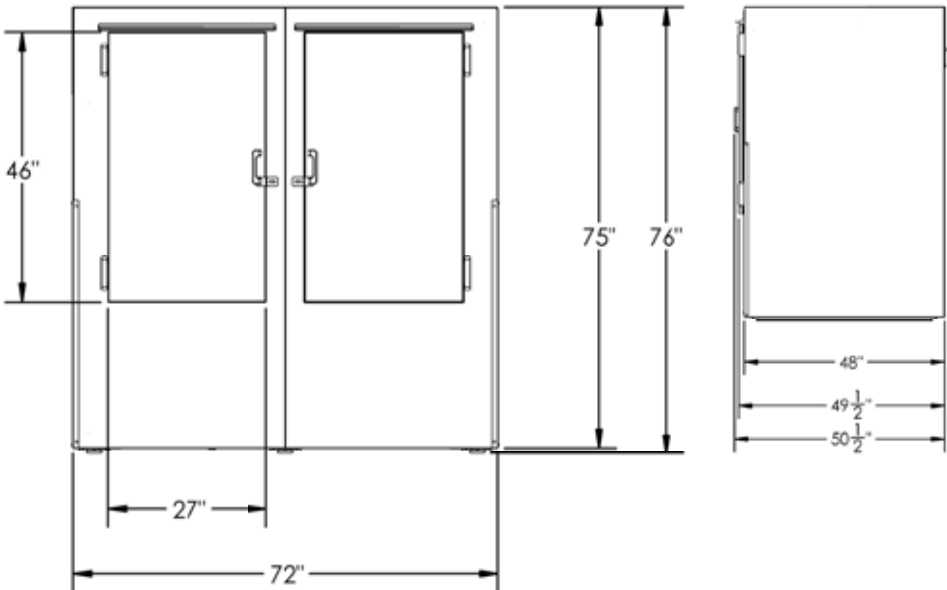





MODEL 120



MODEL 150 CORNER REFRIGERATION

PRODUCT SPECIFICATIONS

Standard Model Numbers

Auto Defrost - R290: TD120UASP

Dimensions & Capacities

7 lb. Bags - Auto Defrost: 310

20 lb. Bags - Auto Defrost: 120

Approx. Interior Cubic Feet: 120

Dimensions (W"xD"xH"):

72 x 48 x 88

Door Size (W"x H"):

27 x 46

Operating Temperature

(X°F - X°F): 16 -24

R290 Control: Electronic

Product Weight

Auto Defrost (lbs.): 820

Electrical

Voltage (V/Hz): 115/60

Min. Circuit Required (Amps): 20

Auto Defrost (Amps): 13

230V/50Hz Available: Upon Request

Other

Compressor (HP): 3/4

Refrigerant: R290

Certifications: UL, cUL

DOE Compliant: Yes


CARB Complaint: R290 Units

NSF Available: No

1. Height Includes Compressor  
2. Add 3" to Depth for Upright Solid Door & Handle  
3. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

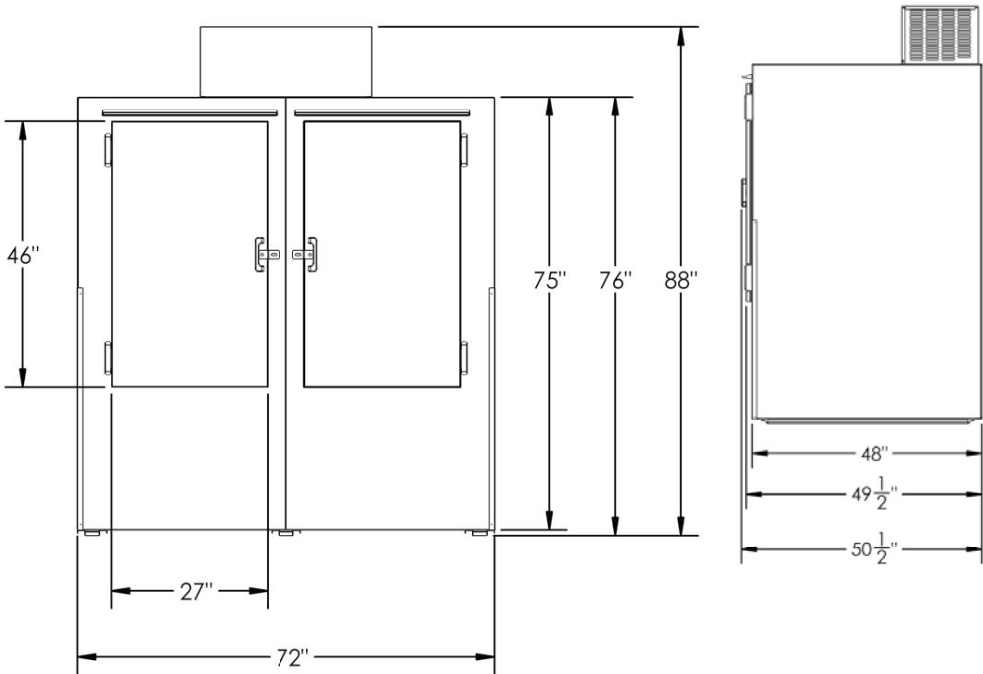

PRODUCT SPECIFICATIONS

Standard Model Numbers

Auto Defrost - R290: CR150UASP

Dimensions & Capacities

7 lb. Bags - Auto Defrost: 360

20 lb. Bags - Auto Defrost: 140

Approx. Interior Cubic Feet: 150

Dimensions (W"xD"xH"):

96 x 48 x 75

Door Size (W"x H"):

27 x 46

Operating Temperature

(X°F - X°F): 16 -24

R290 Control: Electronic

Product Weight

Auto Defrost (lbs.): 970

Electrical

Voltage (V/Hz): 115/60

Min. Circuit Required (Amps): 20

Auto Defrost (Amps): 13

230V/50Hz Available: Upon Request

Other

Compressor (HP): 3/4

Refrigerant: R290

Certifications: UL, cUL

DOE Compliant: Yes


CARB Complaint: R290 Units

NSF Available: No

1. Add 3" to Depth for Upright Solid Door & Handle  
2. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

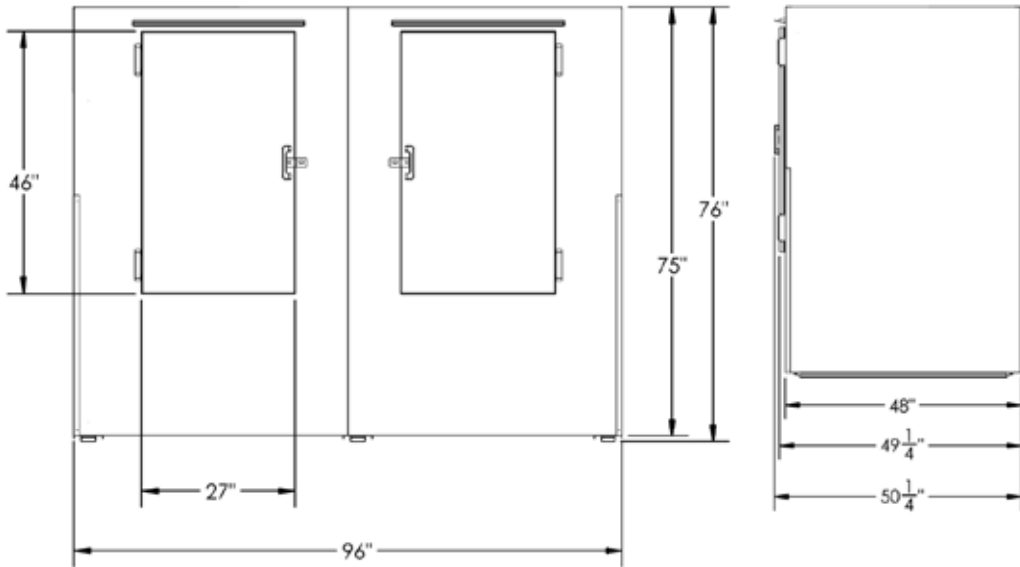



MODEL 155

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |          |
|-----------------------|----------|
| Auto Defrost - R404a: | L155UASX |
| Auto Defrost - R290:  | L155UASP |

Dimensions & Capacities

|                              |              |
|------------------------------|--------------|
| 7 lb. Bags - Auto Defrost:   | 390          |
| 20 lb. Bags - Auto Defrost:  | 150          |
| Approx. Interior Cubic Feet: | 155          |
| Dimensions (W"xD"xH"):       | 90 x 48 x 88 |
| Door Size (W"x H"):          | 27 x 46      |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Mechanical |
| R290 Control:  | Electronic |

Product Weight

|                      |     |
|----------------------|-----|
| Auto Defrost (lbs.): | 970 |
|----------------------|-----|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Compliant:  | R290 Units  |
| NSF Available:   | No          |

1. Height Includes Compressor
2. Add 3" to Depth for Upright Solid Door & Handle
3. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

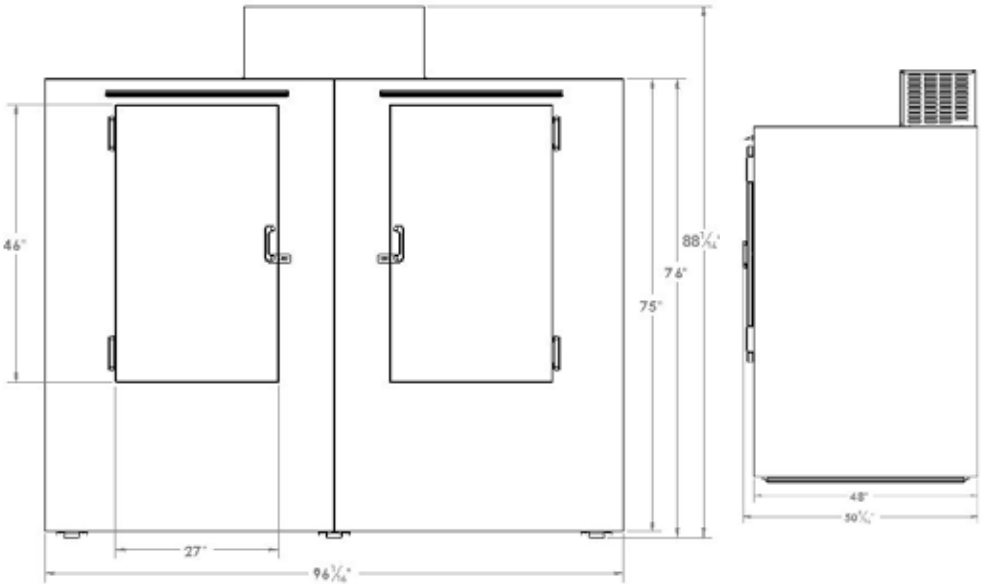

PALLET LOAD ICE MERCHANDISERS



PL150



INDOOR PL225



OUTDOOR PL225

|                               | PL150              | INDOOR PL225       | OUTDOOR PL225      |
|-------------------------------|--------------------|--------------------|--------------------|
| STANDARD MODEL NUMBERS        |                    |                    |                    |
| Auto Defrost - R404a:         | L150UAGEPL         | L225UAGEPL         | L225UASEPL         |
| Auto Defrost - R290:          | L150UAGPPL         | L225UAGPPL         | L225UASPPL         |
| DIMENSIONS & CAPACITIES       |                    |                    |                    |
| 7 lb. Bags - Auto Defrost:    | 260                | 520                | 520                |
| 20 lb. Bags - Auto Defrost:   | 100                | 200                | 200                |
| Approx. Interior Cubic Feet:  | 150                | 225                | 225                |
| Dimensions (W" x D" x H"):    | 72 x 54 x 101      | 108 x 56 x 96.5    | 108 x 56 x 96.5    |
| Door Size (W" x H"):          | 28 x 56            | 28 x 56            | 27 x 55            |
| Loading Door Size             | 64 x 75            | 45 x 75            | 45 x 75            |
| OPERATING TEMPERATURE         |                    |                    |                    |
| (X°F - X°F):                  | 16 - 24            | 16 - 24            | 16 - 24            |
| Control:                      | Electronic Control | Electronic Control | Electronic Control |
| PRODUCT WEIGHT                |                    |                    |                    |
| Auto Defrost (lbs.):          | 1470               | 1780               | 1780               |
| ELECTRICAL                    |                    |                    |                    |
| Voltage (V/Hz):               | 115 / 60           | 115 / 60           | 115 / 60           |
| Min. Circuit Required (Amps): | 20                 | 20                 | 20                 |
| Auto Defrost (Amps):          | 13                 | 13                 | 13                 |
| 230V/50Hz Available:          | Upon Request       | Upon Request       | Upon Request       |
| OTHER                         |                    |                    |                    |
| Compressor (HP):              | 3/4                | 3/4                | 3/4                |
| Refrigerant:                  | R404a, R290        | R404a, R290        | R404a, R290        |
| Certifications:               | UL, cUL            | UL, cUL            | UL, cUL            |
| CARB Compliant:               | R290 Units         | R290 Units         | R290 Units         |
| DOE Compliant:                | Yes                | Yes                | Yes                |
| NSF Available:                | No                 | No                 | No                 |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3.5" to Depth for Glass Door & Handle
4. Add 3" to Depth for Upright Solid Door & Handle
5. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.





## PALLET LOAD ICE MERCHANDISERS

### 1. LEER INC.

- **Your Partner in Temperature-Controlled Storage Solutions** - With over 65 years of industry expertise, innovation and focus on manufacturing excellence, we're confident our products feature industry leading efficiency, reliability, durability and longevity - delivering an unbeatable value to you and your company.
- **Made in Wisconsin, USA** - Manufactured under a strict quality control program to ensure our products are delivered right the first time, right every time.
- **Iconic Red Snow-Capped ICE Decals** - The trademarked ICE decals are a staple of the Packaged Ice Industry and Leer's unique signature that you can't get anywhere else.
- **We're With You Every Degree of the Way** - As an employee owned company, our success depends on your success. We stand behind our products and are dedicated to your success by providing free lifetime technical support. Our engineers and customer service teams are available to help, whether you're a potential new customer or a lifetime customer of Leer.

### 2. CONSTRUCTION FEATURES

- **Patented Construction Features** - All steel construction with no fasteners, welding, or adhesives. The offset seams are precision machine formed, resulting in water-tight lock-form seams that create a stronger and more durable merchandiser. This increases longevity by reducing moisture penetration into the insulation.
- **Patented Removable Floor** - Insulated removable floor designed to easily transfer full pallets of ice in and out of the merchandiser via a pallet jack.
- **High R-Values** - Increased insulation to reduce heat infiltration into the unit - resulting in consistent and optimal temperatures of 16°F - 24°F. There's 3" of high-performance, eco-friendly, insulation in the ceiling and walls.
- **Rust Resistant** - The exterior of the merchandiser is finished with a two-part primer/top coat all-weather paint to provide superior resistance to humidity, corrosion, and other weather conditions.
- **Protective Tread Plate** - Standard with diamond tread plate to protect the merchandiser from dents and damage from customers and shopping carts.
- **Large Interior Capacity** - Interior capacity large enough to fit a full pallet of ice, while still on the pallet.

\*Not all features apply to both models.

### 3. DOOR FEATURES

- **High-Impact Breaker Strip** - High-impact breaker strip, located around the perimeter of the door jamb, durable enough to withstand excessive wear and tear and provide a thermal break between the merchandiser interior and exterior.
- **Aluminum Door Frame** - The glass is encased in a long-lasting, durable, light-weight, aluminum frame.
- **Insulated Tempered Glass** - The doors contain argon-filled insulated tempered glass. The argon insulation decreases the merchandisers' U-Value, which is essentially the amount of solar heat transfer the glass allows into the unit.
- **Spring-Assisted Hinges** - The hinges are adjustable to ensure a lifetime of level, and solid sealing doors. Additionally, the springs help the door close securely and avoid accidentally being left open.
- **Chrome-Finish Hardware** - All hardware, including hinges and handles, have a chrome-finish to provide greater, strength durability, resistance to corrosion, and aesthetics.
- **Large Door Openings** - Oversized door openings for increased view and accessibility of the ice.
- **Oversized Transport-Style Doors** - Oversized transport-style doors large enough for a full pallet of ice to be loaded into the merchandiser via a pallet jack, in just minutes.

### 4. INTERIOR FEATURES

- **High-End Interior Finish** - Bright white interior finish.
- **Interior Lighting** - Standard with energy efficient LED lighting to help showcase the ice.

### 5. REFRIGERATION FEATURES

- **Serviceability** - On Automatic Defrost units, the drop-down evaporator allows for easier troubleshooting, maintenance, and servicing.
- **Compressor Cover** - Standard and provides air flow for better cooling of the condenser and compressor. It's also a layer of protection from harmful foreign objects.
- **Intelligent Electronic Controls** - Electronic controls feature a digital display, factory preset advanced custom settings, and built-in intelligence to ensure your merchandiser will consistently operate at the optimal settings for your environmental needs.



**VIDEO LIBRARY** [leerinc.com/video-library](http://leerinc.com/video-library)







PL150



INDOOR PL225

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |            |
|-----------------------|------------|
| Auto Defrost - R404a: | L150UAGEPL |
| Auto Defrost - R290:  | L150UAGPPL |

Dimensions & Capacities

|                              |               |
|------------------------------|---------------|
| 7 lb. Bags - Auto Defrost:   | 260           |
| 20 lb. Bags - Auto Defrost:  | 100           |
| Approx. Interior Cubic Feet: | 150           |
| Dimensions (W"xD"xH"):       | 72 x 54 x 101 |
| Door Size (W"x H"):          | 28 x 56       |
| Loading Door Size (W" x H"): | 64 x 75       |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Electronic |
| R290 Control:  | Electronic |

Product Weight

|                      |      |
|----------------------|------|
| Auto Defrost (lbs.): | 1470 |
|----------------------|------|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3.5" to Depth for Glass Door & Handle
4. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

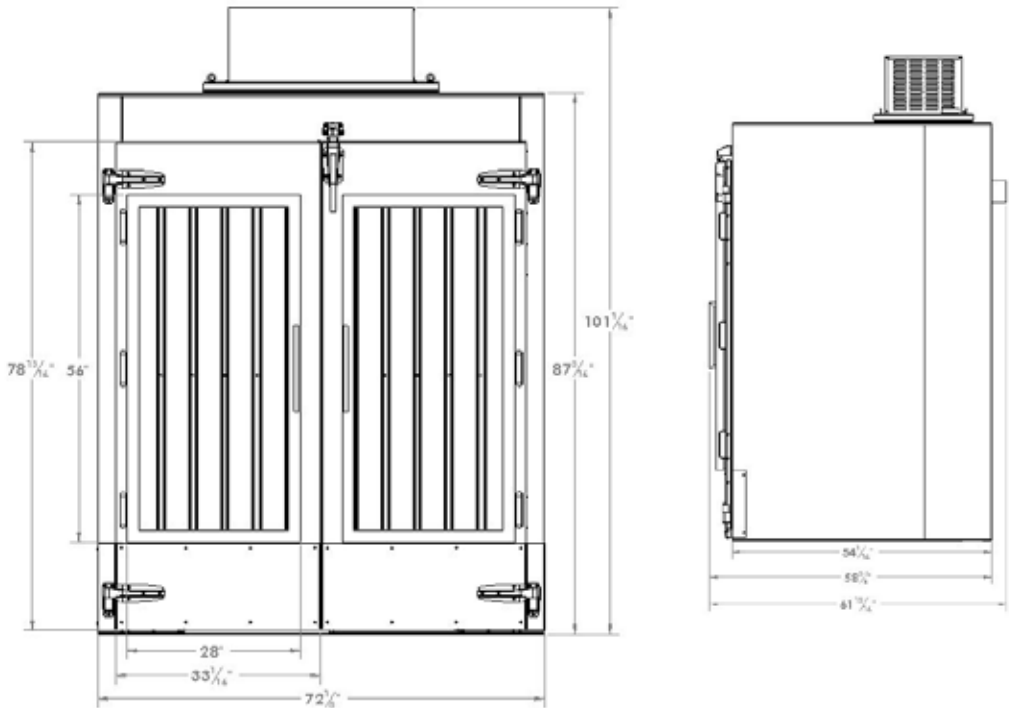

PRODUCT SPECIFICATIONS

Standard Model Numbers

|                       |            |
|-----------------------|------------|
| Auto Defrost - R404a: | L225UAGEPL |
| Auto Defrost - R290:  | L225UAGPPL |

Dimensions & Capacities

|                              |                 |
|------------------------------|-----------------|
| 7 lb. Bags - Auto Defrost:   | 520             |
| 20 lb. Bags - Auto Defrost:  | 200             |
| Approx. Interior Cubic Feet: | 225             |
| Dimensions (W"xD"xH"):       | 108 x 56 x 96.5 |
| Door Size (W"x H"):          | 28 x 56         |
| Loading Door Size (W" x H"): | 45 x 75         |

Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Electronic |
| R290 Control:  | Electronic |

Product Weight

|                      |      |
|----------------------|------|
| Auto Defrost (lbs.): | 1780 |
|----------------------|------|

Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |


Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

1. Height Includes Compressor
2. Add 3" to Depth for Condensate Evaporator Pan
3. Add 3.5" to Depth for Glass Door & Handle
4. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.



DIMENSIONAL DRAWINGS

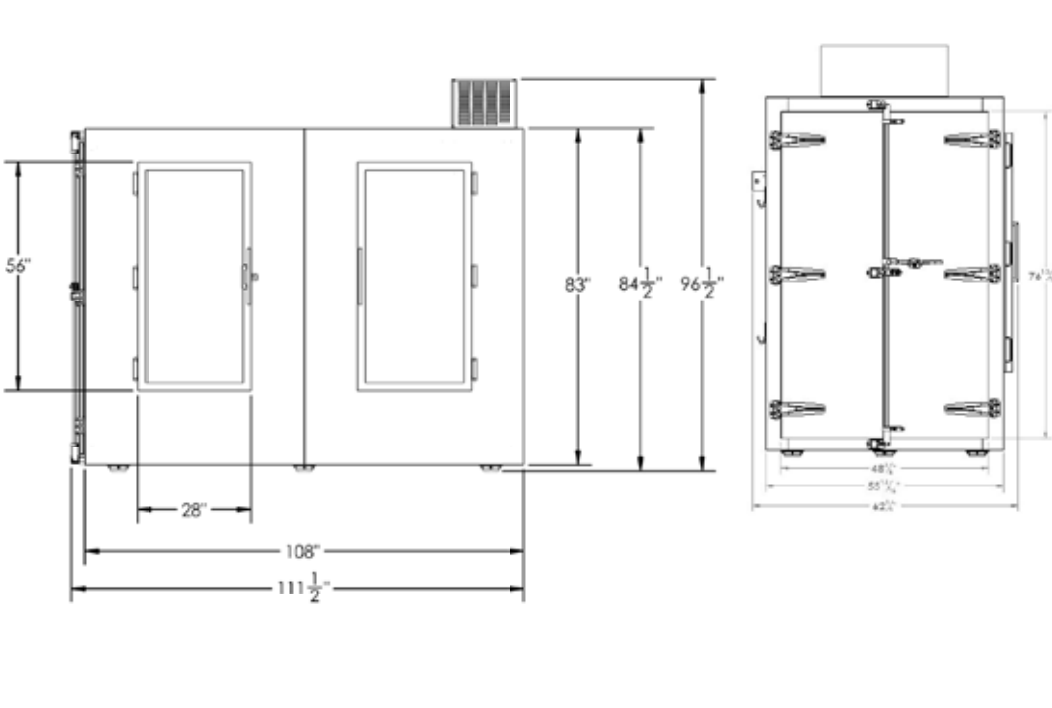





# OUTDOOR PL225

# HOW TO BUY

## PRODUCT SPECIFICATIONS

### Standard Model Numbers

|                       |            |
|-----------------------|------------|
| Auto Defrost – R404a: | L225UASEPL |
| Auto Defrost – R290:  | L225UASPPL |

### Dimensions & Capacities

|                              |                 |
|------------------------------|-----------------|
| 7 lb. Bags - Auto Defrost:   | 520             |
| 20 lb. Bags - Auto Defrost:  | 200             |
| Approx. Interior Cubic Feet: | 225             |
| Dimensions (W"xD"xH"):       | 108 x 56 x 96.5 |
| Door Size (W"x H"):          | 27 x 55         |
| Loading Door Size (W" x H"): | 45 x 75         |

### Operating Temperature

|                |            |
|----------------|------------|
| (X°F - X°F):   | 16 -24     |
| R404a Control: | Electronic |
| R290 Control:  | Electronic |

### Product Weight

|                      |      |
|----------------------|------|
| Auto Defrost (lbs.): | 1780 |
|----------------------|------|


### Electrical

|                               |              |
|-------------------------------|--------------|
| Voltage (V/Hz):               | 115/60       |
| Min. Circuit Required (Amps): | 20           |
| Auto Defrost (Amps):          | 13           |
| 230V/50Hz Available:          | Upon Request |

### Other

|                  |             |
|------------------|-------------|
| Compressor (HP): | 3/4         |
| Refrigerant:     | R404a, R290 |
| Certifications:  | UL, cUL     |
| DOE Compliant:   | Yes         |
| CARB Complaint:  | R290 Units  |
| NSF Available:   | No          |

1. Add 3" to Depth for Upright Solid Door & Handle
2. Merchandiser storage capacities are approximate & may vary due to type of ice, bag size, and methods of loading.

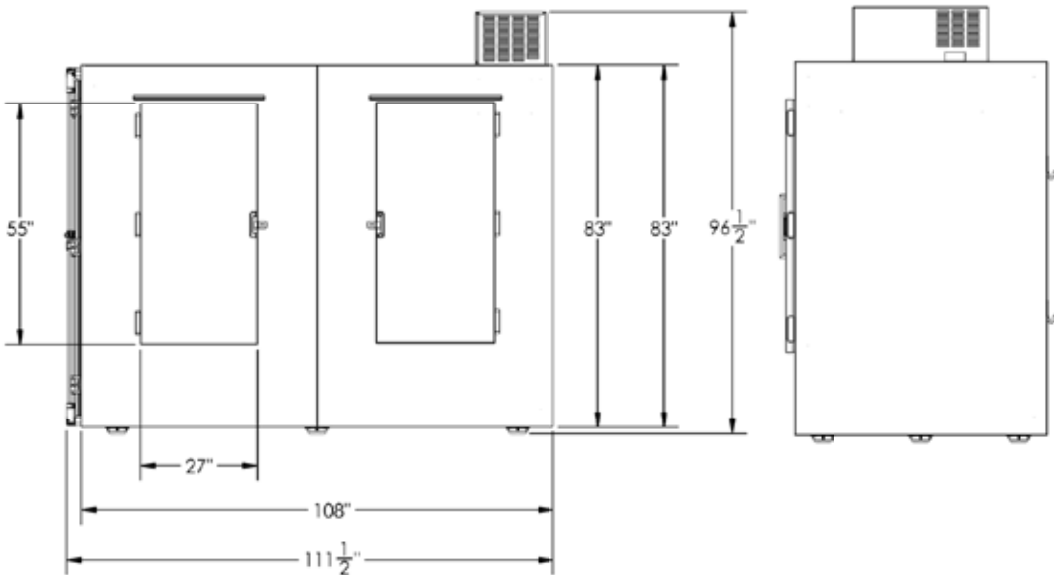

We want to be your trusted partner in temperature-controlled storage solutions and make your buying process as smooth as possible.

## A DEDICATED TEAM OF EMPLOYEE-OWNERS READY TO ASSIST YOU

If you have any questions regarding our products, we welcome you to contact us! We're with you every degree of the way and always ready and happy to assist! Feel free to call, email or fill out our contact us form!

### Call Technical Support and Customer Service:

(800) 766-5337

### Email Us:

[sales@leerinc.com](mailto:sales@leerinc.com)

Leer Inc.  
206 Leer Street  
New Lisbon, WI 53950

## Leer Distributors

### Modern Ice

Tel: 513-367-2101  
Tel: 800-543-1581  
<http://www.modernice.com/>  
[info@modernice.com](mailto:info@modernice.com)

### Automatic Ice Systems

Tel: 800-325-3667  
Tel: 314-849-4411  
<http://www.automaticice.com/>  
[info@automaticice.com](mailto:info@automaticice.com)

### Ice Systems & Supplies

Tel: 800-662-1273  
Tel: 803-324-8791  
<http://www.issionline.com/>  
[info@issi.com](mailto:info@issi.com)

### Ing-Tech Corporation

Tel: 800-599-4744  
<http://www.itcpack.com/>  
[itc@itcpack.com](mailto:itc@itcpack.com)

### Ice Systems Australia

Tel: +61 (0) 7 5495 1425  
<http://www.icesystemsaustralia.com.au/>  
[info@icesystemsaustralia.com.au](mailto:info@icesystemsaustralia.com.au)

### West Cool Germany

Tel: 0049-02102-16759-11  
<http://www.westcool.de/>  
[o.thrun@westcool.de](mailto:o.thrun@westcool.de)

